



Type CP-D Switch mode Power supplies



Characteristics

- Output voltages 12 V, 24 V DC
- Adjustable output voltages (devices > 10 W)
- Output currents 0.42 A / 0.83 A / 1.3 A / 2.1 A / 2.5 A / 4.2 A
- Power range 10 W, 30 W, 60 W, 100 W
- Wide range input 100-240 V AC (90-264 V AC, 120-375 V DC)
- High efficiency of up to 89 %
- Low power dissipation and low heating
- Free convection cooling (no forced cooling with ventilators)
- Ambient temperature range during operation -40°C...+70 °C
- Open-circuit, overload and short-circuit stable
- Integrated input fuse
- U/I characteristic (fold-forward behavior at overload – no switch-off)
- LEDs for status indication
- Light-grey housing
- Approvals / Marks (depending on device, partly pending):



Benefits

Width and structural form ①

With their width between 18 and 90 mm, the CP-D range switch mode power supplies are ideally suited for installation in distribution panels.

Wide range input ②

Optimized for world-wide applications: The CP-D power supplies can be supplied with 90-264 V AC or 120-375 V DC.

Adjustable output voltage ③

The CP-D range types > 10 W feature a continuously adjustable output voltage. Thus, they can be optimally adapted to the application, e.g. compensating the voltage drop caused by a long line length.

CP-D Range Ordering details

Description

The CP-D range of modular power supply units in MDRC design (modular DIN rail components) is ideally suited for installation in distribution panels. This range offers devices with output voltages of 12 V DC and 24 V DC at output currents of 0.42 A to 4.2 A. Thanks to a high thermal efficiency corresponding to low power and heat dissipation, the devices can be operated without forced cooling. All devices feature the U/I output characteristic (fold forward behavior). All power supply units in the CP-D range are approved according to all relevant international standards.



CP-D 12/0.83, CP-D 24/0.42



CP-D 12/2.1, CP-D 24/1.3



CP-D 24/2.5

Ordering details

Input voltage range	Rated output voltage / current	Type	Catalog number	Weight (1 pce) kg (lb)
90-264 V AC/ 120-375 V DC	12 V DC / 0.83 A	CP-D 12/0.83	1SVR427041R1000	0.06 (0.13)
90-264 V AC/ 120-375 V DC	12 V DC / 2.1 A	CP-D 12/2.1	1SVR427043R1200	0.19 (0.41)
90-264 V AC/ 120-375 V DC	24 V DC / 0.42 A	CP-D 24/0.42	1SVR427041R0000	0.06 (0.13)
90-264 V AC/ 120-375 V DC	24 V DC / 1.3 A	CP-D 24/1.3	1SVR427043R0100	0.19 (0.41)
90-264 V AC/ 120-375 V DC	24 V DC / 2.5 A	CP-D 24/2.5	1SVR427044R0200	0.25 (0.56)
90-264 V AC/ 120-375 V DC	24 V DC / 4.2 A	CP-D 24/4.2	1SVR427045R0400	0.32 (0.71)

Ordering details - CP-D RU for decoupling of two CP-D power supply units

Input voltage range	Rated input current	Rated output voltage / current	Type	Catalog number	Weight (1 pce) kg (lb)
9-35 V DC	2 x 5 A	24 V DC / 1 x 10 A	CP-D RU	1SVR427049R0000	0.075 (0.165)

CP-D Range

Technical data

Data at $T_a = 25\text{ °C}$, $U_n = 230\text{ V AC}$ and rated values, unless otherwise indicated

Type	CP-D 12/0.83	CP-D 12/2.1
Input circuit - supply circuit		
Rated input voltage U_n	L, N 100-240 V AC	
Input voltage range	90-264 V AC / 120-375 V DC	
Frequency range AC	47-63 Hz	
Typical input current / typical power consumption	at 110 V AC 200 mA / 12.68 W	502 mA / 31.14 W
	at 230 V AC 128.3 mA / 13.01 W	277 mA / 31.2 W
Inrush current limiting	at 230 V AC 30 A (max. 3 ms)	50 A (max. 3 ms)
Power failure buffering time	min. 30 ms	
Internal input fuse	1 A slow-acting / 250 V AC	2 A slow-acting / 250 V AC
Power factor correction (PFC)	no	
Indication of operational states		
Output voltage	DC ON: green LED DC LOW: red LED	output voltage applied output voltage too low
Output circuit		
Rated output voltage	+ , -	++ , -- 12 V DC
Tolerance of the output voltage		$\pm 1\%$
Adjustment range of the output voltage	-	12-14 V DC
Rated output power	10 W	30 W
Rated output current I_r	$T_a \leq 60\text{ °C}$ 0.83 A	2.1 A
Derating of the output current	$60\text{ °C} < T_a \leq 70\text{ °C}$	2.5 %/°C
Maximum deviation with change of output voltage within the input voltage range	load change statical	1 % 1 %
Control time		< 1 ms
Starting time after applying the supply voltage	at I_r	1000 ms
Rise time	at rated load	typ. 1 ms
Residual ripple and switching peaks	BW = 20 MHz	50 mV
Parallel connection		yes, using CP-D RU
Series connection		yes, to increase voltage
Resistance to reverse feed		18 V / 1 s
Output circuit - No-load, overload and short-circuit behavior		
Characteristic curve of output		U/I characteristic curve
Short-circuit protection		continuous short-circuit stability
Short-circuit behavior		continuation with output power limiting
Current limiting at short circuit	typ. 1.4 A	typ. 5.9 A
Overload protection		output power limiting
Overvoltage protection		15-16.5 VDC
No-load protection		continuous no-load stability
Starting of capacitive loads		unlimited
General data		
Efficiency	typ. 78 %	typ. 82 %
Duty time	100 %	
Dimensions (W x H x D)	18 x 91 x 57.5 mm [0.71 x 3.58 x 2.26 in]	53 x 91 x 57.5 mm [2.09 x 3.58 x 2.26 in]
Weight	0.066 kg (0.13 lb)	0.196 kg (0.41 lb)
Material of housing	plastic	
Mounting	DIN rail (IEC/EN 60715), snap-on mounting without any tool	
Mounting position	horizontal	
Minimum distance to other units	horizontal / vertical	25 mm / 25 mm (0.98 in / 0.98 in)
Degree of protection	housing / terminals	IP20 / IP20
Protection class	II	

CP-D Range

Technical data

Data at $T_a = 25\text{ °C}$, $U_n = 230\text{ V AC}$ and rated values, unless otherwise indicated

Type		CP-D 12/0.83	CP-D 12/2.1
Electrical connection - Input circuit / Output circuit			
Wire size	fine-strand with wire end ferrule	0.2-1.5 mm ² (24-16 AWG)	0.2-2.5 mm ² (24-14 AWG)
	rigid	0.2-2.5 mm ² (26-12 AWG)	0.2-2.5 mm ² (24-12 AWG)
Stripping length		4-5 mm (0.16-0.2 in)	7 mm (0.28 in)
Tightening torque		0.6 Nm (5 lb.in)	0.7 Nm (6 lb.in)
Environmental data			
Ambient temperature range	operation	-40...+70 °C	
	rated load	-40...+60 °C	
	storage	-40...+85 °C	
Damp heat (cyclic) (IEC/EN 60068-2-30)		4 x 24 cycles, 40 °C, 95 % RH	
Vibration (sinusoidal) (IEC/EN 60068-2-6)		50 m/s ² , 10 Hz - 2 kHz	
Shock (half-sine) (IEC/EN 60068-2-27)		40 m/s ² , 22 ms	
Isolation data			
Rated insulation voltage U_i	input circuit / output circuit	3 kV AC	
Pollution degree		2	
Overvoltage category (UL/IEC/EN 60950-1)		II	
Standards			
Product standard		EN 61204	
Low Voltage Directive		2006/95/EC	
EMC Directive		2004/108/EC	
Electrical safety		UL 508, UL 60950-1, EN 60950-1	
Protective low voltage		SELV (EN 60950-1)	
Electromagnetic compatibility			
Interference immunity to		EN 61000-6-2	
electrostatic discharge	IEC/EN 61000-4-2	Level 4 (4 kV / 8 kV)	Level 4 (8 kV / 15 kV)
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)	
electrical fast transient/burst	IEC/EN 61000-4-4	Level 4 (4 kV)	
surge	IEC/EN 61000-4-5	Level 3 (2 kV L-L)	
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)	
Interference emission		EN 61000-6-3	
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B	
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B	

Approvals and marks on page 11.3.

CP-D Range

Technical data

Data at $T_a = 25\text{ °C}$, $U_{in} = 230\text{ V AC}$ and rated values, unless otherwise indicated

Type	CP-D 24/0.42	CP-D 24/1.3	CP-D 24/2.5	CP-D 24/4.2
Input circuit - supply circuit	L, N			
Rated input voltage U_{in}	100-240 V AC			
Input voltage range	90-264 V AC / 120-375 V DC			
Frequency range AC	47-63 Hz			
Typical input current / typical power consumption	at 110 V AC 184 mA / 11.62 W	600 mA / 37.92 W	1120 mA / 69.3 W	1800 mA / 117.3 W
	at 230 V AC 120.6 mA / 12 W	344 mA / 38.16 W	660 mA / 70.1 W	900 mA / 114.4 W
Inrush current limiting	at 230 V AC 30 A (max. 3 ms)	50 A (max. 3 ms)	60 A (max. 3 ms)	
Power failure buffering time	min. 30 ms		min. 60 ms	
Internal input fuse	1 A slow-acting / 250 V AC	2 A slow-acting / 250 V AC		3.15 A slow-acting / 250 V AC
Power factor correction (PFC)	no			

Indication of operational states

Output voltage	DC ON: green LED DC LOW: red LED	output voltage applied output voltage too low		
Output circuit		+, -	++, --	
Rated output voltage		24 V DC		
Tolerance of the output voltage		±1 %		
Adjustment range of the output voltage		-	24-28 V DC	
Rated output power		10 W	30 W	60 W
Rated output current I_o		$T_a \leq 60\text{ °C}$: 0.42 A	$T_a \leq 60\text{ °C}$: 1.3 A	$T_a \leq 55\text{ °C}$: 2.5 A
Derating of the output current		$60\text{ °C} < T_a \leq 70\text{ °C}$: 2.5 %/°C	$60\text{ °C} < T_a \leq 70\text{ °C}$: 2.5 %/°C	$55\text{ °C} < T_a \leq 70\text{ °C}$: 2.5 %/°C
Maximum load change statical deviation with change of output voltage within the input voltage range		1 %		
Control time		< 1 ms		
Starting time after applying the supply voltage	at I_o	1000 ms		
Rise time	at rated load	typ. 1 ms		
Residual ripple and switching peaks	BW = 20 MHz	50 mV		
Parallel connection		yes, using CP-D RU		
Series connection		yes, to increase voltage		
Resistance to reverse feed		35 V / 1 s		

Output circuit - No-load, overload and short-circuit behavior

Characteristic curve of output		U/I characteristic curve		
Short-circuit protection		continuous short-circuit stability		
Short-circuit behavior		continuation with output power limiting		
Current limiting at short circuit		typ. 0.78 A	typ. 4.2 A	typ. 6.05 A
Overload protection		typ. 11.5 A		
Overvoltage protection		output power limiting		
No-load protection		30-33 V DC		
Starting of capacitive loads		continuous no-load stability		
		unlimited		

General data

Efficiency		typ. 80 %	typ. 83 %	typ. 86 %	typ. 89 %
Duty time		100 %			
Dimensions (W x H x D)		18 x 91 x 57.5 mm [0.71 x 3.58 x 2.26 in]	53 x 91 x 57.5 mm [2.09 x 3.58 x 2.26 in]	71 x 91 x 57.5 mm [2.80 x 3.58 x 2.26 in]	89.9 x 91 x 57.5 mm [3.54 x 3.58 x 2.26 in]
Weight		0.066 kg (0.13 lb)	0.196 kg (0.41 lb)	0.252 kg (0.55 lb)	0.386 kg / (0.72 lb)
Material of housing		plastic			
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool			
Mounting position		horizontal			
Minimum distance to other units	horizontal / vertical	25 mm / 25 mm (0.98 in / 0.98 in)			
Degree of protection	housing / terminals	IP20 / IP20			
Protection class		II			

CP-D Range Technical data

Data at $T_a = 25\text{ °C}$, $U_n = 230\text{ V AC}$ and rated values, unless otherwise indicated

Type		CP-D 24/0.42	CP-D 24/1.3	CP-D 24/2.5	CP-D 24/4.2
Electrical connection - Input circuit / Output circuit					
Wire size	fine-strand with wire end ferrule	0.2-1.5 mm ² (24-16 AWG)	0.2-2.5 mm ² (24-14 AWG)		
	rigid				
Stripping length		4-5 mm (0.16-0.2 in)		7 mm (0.28 in)	
Tightening torque		0.6 Nm (5 lb.in)		0.7 Nm (6 lb.in)	
Environmental data					
Ambient temperature range	operation	-40...+70 °C			
	rated load	-40...+60 °C	-40...+55 °C	-40...+60 °C	
	storage	-40...+85 °C			
Damp heat (cyclic) (IEC/EN 60068-2-30)		4 x 24 cycles, 40 °C, 95 % RH			
Vibration (sinusoidal) (IEC/EN 60068-2-6)		50 m/s ² , 10 Hz - 2 kHz			
Shock (half-sine) (IEC/EN 60068-2-27)		40 m/s ² , 22 ms			
Isolation data					
Rated insulation voltage U_i	input circuit / output circuit	3 kV AC	4 kV AC	3 kV AC	
Pollution degree		2			
Overvoltage category (UL/IEC/EN 60950-1)		II			
Standards					
Product standard		EN 61204			
Low Voltage Directive		2006/95/EC			
EMC Directive		2004/108/EC			
Electrical safety		UL 508, UL 60950-1, EN 60950-1			
Protective low voltage		SELV (EN 60950-1)			
Electromagnetic compatibility					
Interference immunity to		EN 61000-6-2			
	electrostatic discharge	IEC/EN 61000-4-2	Level 4 (4 kV / 8 kV)	Level 4 (8 kV / 15 kV)	Level 4 (4 kV / 8 kV)
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)			
electrical fast transient/burst	IEC/EN 61000-4-4	Level 4 (4 kV)			
surge	IEC/EN 61000-4-5	Level 3 (2 kV L-L)			
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)			
Interference emission		EN 61000-6-3			
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B			
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B			

Approvals and marks on page 11.3.

CP-D Range

Technical data

Data at $T_a = 25\text{ °C}$, $U_{in} = 230\text{ V AC}$ and rated values, unless otherwise indicated


Type		CP- D RU
Input circuit - Supply circuit		IN 1 + + -, IN 2 + + -
Rated input voltage U_{in}		24 V DC
Input voltage range		9-35 V DC
Rated input current I_{in} per channel		5 A
Maximum input current per channel		10 A for 300 s
Transient overvoltage protection		no
Output circuit		OUT + + +, - - -
Rated output voltage U_{out}		24 V DC
Voltage drop		typ. 0.5 V
Rated output current I_{out}		10 A
Resistance to reverse feed		< 35 V
General data		
MTBF		on request
Duty time		100 %
Dimensions (W x H x D)	product dimensions	35 x 91 x 56.5 mm (1.38 x 3.58 x 2.22 in)
	packaging dimensions	134 x 94 x 48 mm (5.28 x 3.70 x 1.89 in)
Weight	net weight	0.075 kg (0.165 lb)
	gross weight	0.130 kg (0.286 lb)
Material of housing		plastic
Mounting		DIN rail, snap-on mounting without any tool
Mounting position		horizontal
Minimum distance to other units	horizontal / vertical	25 mm (0.98 in) / 25 mm (0.98 in)
Electrical connection - Input circuit / Output circuit		
Wire size	fine-strand with (out)	0.2-2.5 mm ² (24-14 AWG)
	wire end ferrule	
	rigid	
Stripping length		7.0 mm (0.28 in)
Tightening torque		0.67 Nm (6 lb.in)
Environmental data		
Ambient temperature range	operation	-40...+70 °C
	storage	-40...+85 °C
Relative humidity	RH at 40 °C	20-95 %, no condensation
Vibration (IEC/EN 60068-2-6)		Mounting by rail: 10-500 Hz, 2 G, along X, Y, Z each axis, 60 min for each axis
Shock (IEC/EN 60068-2-27)		15 G, 11 ms, 3 axis, 6 faces, 3 times for each face
Standards		
Product standard		IEC/EN 61204-3
Low Voltage Directive		2006/95/EC
EMC Directive		2004/108/EC
RoHS Directive		2002/95/EC
Electromagnetic compatibility		
Interference immunity to		EN 55024
electrostatic discharge	IEC/EN 61000-4-2	Level 3, air discharge 8 kV, contact discharge 4 kV
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3, 10 V/m
electrical fast transient/burst	IEC/EN 61000-4-4	Level 3, 2 kV / 5 kHz
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3, 10 V
Interference emission		EN 55022
high-frequency radiated	IEC/CISPR 22 / EN 55022	Class B
high-frequency conducted	IEC/CISPR 22 / EN 55022	Class B

CP-D Range


Technical diagrams
Approximate dimensions

Technical diagrams

Characteristic curve of output at $T_a = 25^\circ\text{C}$




CP-D 12/0.83




CP-D 12/2.1


Characteristic curve of Temperature at rated output voltage




CP-D¹⁾



CP-D 24/0.42




CP-D 24/1.3




CP-D 24/2.5

11



CP-D 24/2.5




CP-D 24/4.2


¹⁾ except CP-D 24/2.5

Dimensional drawings


dimensions in mm

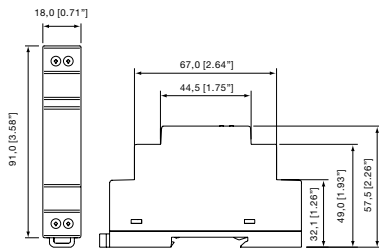


CP-D 12/0.83, CP-D 24/0.42

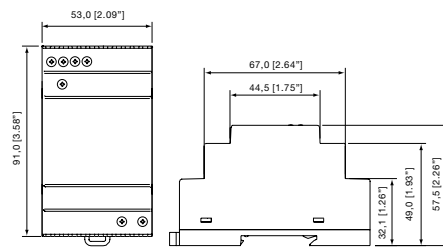


CP-D 12/2.1, CP-D 24/1.3

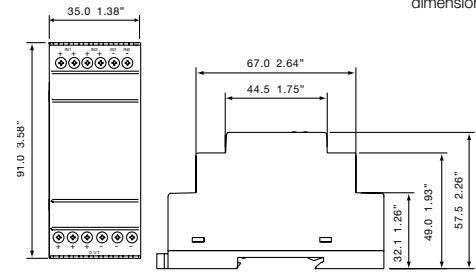

CP-D RU

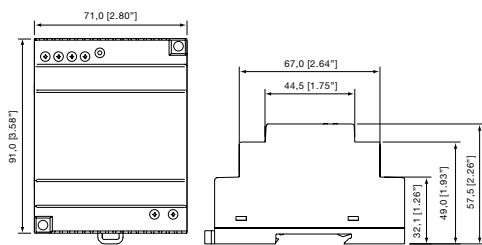

CP-D 24/2.5

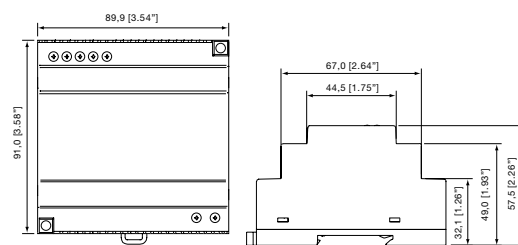

CP-D 24/4.2