SIEMENS

Data sheet

US2:18DP92BDL91



Non-reversing motor starter Size 1 Three phase full voltage Amb compensate bimetal OLrelay Contactor amp rating 27Amp 240V 50HZ / 277V 60HZ coil Combination type 25Amp circuit breaker Enclosure NEMA type 1 Indoor general purpose use Standard width enclosure

Figure similar

General technical data	
Weight [lb]	35 lb
Height x Width x Depth [in]	24 × 11 × 8 in
Protection against electrical shock	NA for enclosed products
Installation altitude [ft] at height above sea level maximum	6560 ft
Ambient temperature [°F] during storage	-22 +149 °F
Ambient temperature [°F] during operation	-4 +104 °F
Ambient temperature during storage	-30 +65 °C
Ambient temperature during operation	-20 +40 °C
Country of origin	USA
Horsepower ratings	
Yielded mechanical performance [hp] for three-phase	
AC motor	
• at 200/208 V rated value	3 hp
• at 220/230 V rated value	3 hp
• at 460/480 V rated value	7.5 hp

value
•

7.5 hp

ContactorNumber of NO contacts for main contacts3Operating voltage for main current circuit at AC at 60600 VHz maximum27 AOperating current at AC at 600 V rated value27 AMechanical service life (switching cycles) of the main contacts typical10000000Auxiliary contact0Number of NC contacts at contactor for auxiliary contacts0Number of NO contacts at contactor for auxiliary contacts1Number of total auxiliary contacts maximum8Contact rating of auxiliary contacts of contactor according to UL10A@600CoilCoilType of voltage of the control supply voltage • at DC rated value240• at AC at 60 Hz rated value277 277• at AC at 50 Hz rated value240 240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at ACApparent holding power of magnet coil at AC25 V-AOperating range factor control supply voltage rated value of magnet coil0.85Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 mOff-delay time10 24 m	AC (A600), 5A@600VDC (P600)
Number of NO contacts for main contacts3Operating voltage for main current circuit at AC at 60600 VHz maximum27 AOperating current at AC at 600 V rated value27 AMechanical service life (switching cycles) of the main contacts typical10000000Auxiliary contact0Number of NC contacts at contactor for auxiliary contacts0Number of NO contacts at contactor for auxiliary contacts1Number of total auxiliary contacts maximum8Contact rating of auxiliary contacts of contactor according to UL10A@600'Coil	AC (A600), 5A@600VDC (P600)
Hz maximum27 AOperating current at AC at 600 V rated value27 AMechanical service life (switching cycles) of the main contacts typical1000000Auxiliary contact1000000Number of NC contacts at contactor for auxiliary contacts0Number of NO contacts at contactor for auxiliary contacts1Number of total auxiliary contacts maximum8Contact rating of auxiliary contacts of contactor according to UL10A@6000Coil10A@6000Type of voltage of the control supply voltageACControl supply voltage0• at DC rated value240• at AC at 60 Hz rated value240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC25 V-AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	AC (A600), 5A@600VDC (P600)
Mechanical service life (switching cycles) of the main contacts typical1000000Auxiliary contact1Number of NC contacts at contactor for auxiliary contacts0Number of NO contacts at contactor for auxiliary contacts1Number of total auxiliary contacts maximum8Contact rating of auxiliary contacts of contactor according to UL10A@6000Coil10A@6000Type of voltage of the control supply voltageACControl supply voltage0• at DC rated value0• at AC at 60 Hz rated value240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC25 V-AOperating range factor control supply voltage rated value of magnet coil50 %Percental drop-out voltage of magnet coil related to the input voltage50 %	AC (A600), 5A@600VDC (P600)
contacts typicalAuxiliary contactNumber of NC contacts at contactor for auxiliary contacts0Number of NO contacts at contactor for auxiliary contacts1Number of total auxiliary contacts maximum8Contact rating of auxiliary contacts of contactor according to UL10A@6000CoilCoilControl supply voltage• at DC rated value0 0 V• at AC at 60 Hz rated value277 277• at AC at 50 Hz rated value240 240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC218 V-AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	AC (A600), 5A@600VDC (P600)
Number of NC contacts at contactor for auxiliary contacts0Number of NO contacts at contactor for auxiliary contacts1Number of total auxiliary contacts maximum8Contact rating of auxiliary contacts of contactor according to UL10A@6001Coil10A@6001Control supply voltageACControl supply voltage0• at DC rated value0• at AC at 60 Hz rated value277• at AC at 50 Hz rated value240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %	AC (A600), 5A@600VDC (P600)
contacts1Number of NO contacts at contactor for auxiliary contacts1Number of total auxiliary contacts maximum8Contact rating of auxiliary contacts of contactor according to UL10A@6000CoilType of voltage of the control supply voltage• at DC rated value0 0 V• at AC at 60 Hz rated value240 240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC218 V-AApparent holding power of magnet coil at AC25 V-AOperating range factor control supply voltage rated value of magnet coil0 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %	AC (A600), 5A@600VDC (P600)
contacts8Number of total auxiliary contacts maximum8Contact rating of auxiliary contacts of contactor according to UL10A@600VCoilType of voltage of the control supply voltageACControl supply voltage0 0 V• at DC rated value277 277• at AC at 60 Hz rated value240 240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC218 V·AApparent holding power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	AC (A600), 5A@600VDC (P600)
Contact rating of auxiliary contacts of contactor according to UL10A@6001CoilImage: Control supply voltageACType of voltage of the control supply voltageACControl supply voltage0 0 V• at DC rated value277 277• at AC at 60 Hz rated value240 240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC218 V·AApparent holding power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil50 %Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	AC (A600), 5A@600VDC (P600)
according to ULCoilType of voltage of the control supply voltageACControl supply voltage0 0 V• at DC rated value277 277• at AC at 60 Hz rated value240 240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC218 V·AApparent holding power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	AC (A600), 5A@600VDC (P600)
Type of voltage of the control supply voltageACControl supply voltage0 0 V• at DC rated value277 277• at AC at 60 Hz rated value240 240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC218 V·AApparent holding power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	
Control supply voltage0 0 V• at DC rated value0 0 V• at AC at 60 Hz rated value277 277• at AC at 50 Hz rated value240 240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC218 V·AApparent holding power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	
• at DC rated value0 0 V• at AC at 60 Hz rated value277 277• at AC at 50 Hz rated value240 240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC218 V·AApparent holding power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	
• at AC at 60 Hz rated value277 277• at AC at 50 Hz rated value240 240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC218 V·AApparent holding power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	
• at AC at 50 Hz rated value240 240Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC218 V·AApparent holding power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	
Holding power at AC minimum8.6 WApparent pick-up power of magnet coil at AC218 V·AApparent holding power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	V
Apparent pick-up power of magnet coil at AC218 V·AApparent holding power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	V
Apparent holding power of magnet coil at AC25 V·AOperating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	
Operating range factor control supply voltage rated value of magnet coil0.85 1.1Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	
value of magnet coil50 %Percental drop-out voltage of magnet coil related to the input voltage50 %Switch-on delay time19 29 m	
the input voltageSwitch-on delay time19 29 m	
Off-delay time 10 24 m	;
Overload relay	
Product function	
Overload protection Yes	
• Test function Yes	
• External reset Yes	
Reset function Manual an	lautomatic
Adjustment range of thermal overload trip unit 0.85 1.1	5
Number of NC contacts of auxiliary contacts of 1 overload relay	
Number of NO contacts of auxiliary contacts of1overload relay1	

Operating current of auxiliary contacts of overload	
relay	
• at AC at 600 V	10 A
• at DC at 250 V	5 A
Contact rating of auxiliary contacts of overload relay according to UL	10A@600VAC (A600), 5A@250VDC (P300)
Enclosure	
Degree of protection NEMA rating of the enclosure	NEMA Type 1
Design of the housing	Indoor general purpose use
Motor Circuit Protector (magnetic trip only)	
Operating current of motor circuit breaker rated value	25 A
Adjustable pick-up value current of instantaneous short-circuit trip unit	55 180 A
Mounting/wiring	
(mounting position)	Vertical
(mounting type)	Surface mounting and installation
Type of electrical connection for supply voltage line- side	Box lug
Type of connectable conductor cross-sections at line- side at AWG conductors single or multi-stranded	1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG)
Temperature of the conductor for supply maximum permissible	75 °C
Material of the conductor for supply	AL or CU
Type of electrical connection for load-side outgoing feeder	Screw-type terminals
Tightening torque [lbf·in] for load-side outgoing feeder	35 50 lbf·in
Type of electrical connection of magnet coil	Screw-type terminals
Tightening torque [lbf·in] at magnet coil	5 12 lbf·in
Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded	2x (16 12 AWG)
Temperature of the conductor at magnet coil maximum permissible	75 °C
Material of the conductor at magnet coil	CU
Type of electrical connection for auxiliary contacts	Screw-type terminals
Tightening torque [lbf·in] at contactor for auxiliary contacts	10 15 lbf·in
Type of connectable conductor cross-sections at contactor at AWG conductors for auxiliary contacts single or multi-stranded	1x (12 AWG), 2x (16 14 AWG), 2x (18 16 AWG)
Temperature of the conductor at contactor for auxiliary contacts maximum permissible	75 °C

Material of the conductor at contactor for auxiliary contacts	CU
Type of electrical connection at overload relay for	Screw-type terminals
auxiliary contacts	
Tightening torque [lbf·in] at overload relay for	5 12 lbf·in
auxiliary contacts	
Type of connectable conductor cross-sections at	2x (16 12 AWG)
	2X (10 12 AWG)
overload relay at AWG conductors for auxiliary	
contacts single or multi-stranded	
Temperature of the conductor at overload relay for	75 °C
auxiliary contacts maximum permissible	
Material of the conductor at overload relay for	CU
-	
auxiliary contacts	
Short-circuit current rating	
Design of the short-circuit trip	Motor circuit protector (magnetic trip only)
Maximum short-circuit current breaking capacity (Icu)	
• at 240 V	100 kA
• at 480 V	100 kA
● at 600 V	25 kA

urther information

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog


Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:18DP92BDL91

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/US/en/ps/US2:18DP92BDL91

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:18DP92BDL91&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:18DP92BDL91/certificate

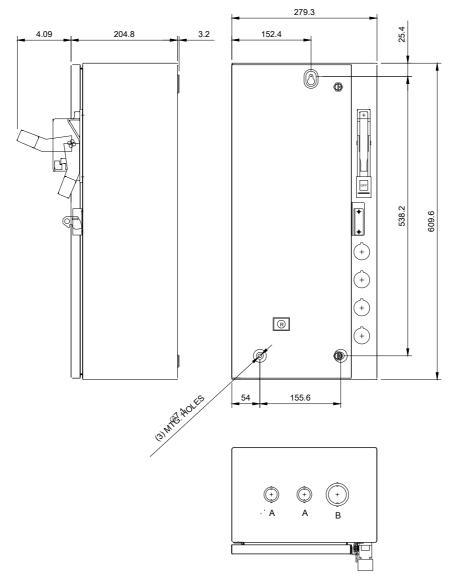

LCONDUITS TYP. TOP & BOTTOM

LETTER	CONDUIT SIZE
A	%%C12.7 & %%C19 CONDUIT
В	Ø25.4 & Ø31.8 CONDUIT



D68782001

last modified:

05/08/2019