

contactor-LTG-combo,fus,20A,N1, contactor-LTG-combo,fus,20A,N1,



Figure similar

General technical data	
Weight [lb]	35 lb
Height x Width x Depth [in]	24 × 11 × 8 in
Protection against electrical shock	NA for enclosed products
Installation altitude [ft] at height above sea level maximum	6560 ft
Country of origin	USA

Contactor	
Number of NO contacts for main contacts	3
Number of NC contacts for main contacts	0
Operating voltage for main current circuit at AC at 60 Hz maximum	600 V
Contact rating of the main contacts of lighting contactor	
<ul style="list-style-type: none"> <li>• at tungsten (1 pole per 1 phase) rated value</li> <li>• at tungsten (2 poles per 1 phase) rated value</li> <li>• at tungsten (3 poles per 3 phases) rated value</li> </ul>	<p>20A @250V 1p 1ph</p> <p>20A @250V 2p 1ph</p> <p>20A @250V 3p 3ph</p>

- at ballast (1 pole per 1 phase) rated value
- at ballast (2 poles per 1 phase) rated value
- at ballast (3 poles per 3 phases) rated value
- at resistive load (1 pole per 1 phase) rated value
- at resistive load (2 poles per 1 phase) rated value
- at resistive load (3 poles per 3 phases) rated value

20A @347V 1p 1ph  
 20A @600V 2p 1ph  
 20A @600V 3p 3ph  
 30A @347V 1p 1ph  
  
 30A @600V 2p 1ph  
  
 30A @600V 3p 3ph

### Auxiliary contact

Number of NC contacts for auxiliary contacts	0
Number of NO contacts for auxiliary contacts	0
Number of total auxiliary contacts maximum	4
Contact rating of auxiliary contacts of contactor according to UL	NA

### Coil

Type of voltage of the control supply voltage	AC
Control supply voltage	
<ul style="list-style-type: none"> <li>• at DC rated value</li> <li>• at AC at 60 Hz rated value</li> <li>• at AC at 50 Hz rated value</li> </ul>	0 ... 0 V 265 ... 277 V 265 ... 277 V
Apparent pick-up power of magnet coil at AC	600 V·A
Apparent holding power of magnet coil at AC	6 V·A
Operating range factor control supply voltage rated value of magnet coil	0.85 ... 1.1

### Disconnect Switch

Rated response values of switch disconnecter	30A / 600V
Design of fuse holder	Class R fuse clips
Operating class of the fuse link	Class R

### Enclosure

Degree of protection NEMA rating of the enclosure	NEMA 1 enclosure
Design of the housing	Indoor general purpose use

### Mounting/wiring

(mounting position)	Vertical
(mounting type)	Surface mounting and installation
Type of electrical connection for supply voltage line-side	Box lug
Tightening torque [lbf·in] for supply	35 ... 35 lbf·in
Type of connectable conductor cross-sections at line-side at AWG conductors single or multi-stranded	1x (14 ... 2 AWG)
Temperature of the conductor for supply maximum permissible	75 °C

Material of the conductor for supply	AL or CU
Type of electrical connection for load-side outgoing feeder	Screw-type terminals
Tightening torque [lbf·in] for load-side outgoing feeder	18 ... 18 lbf·in
Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded	2x (18 ... 10 AWG)
Temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
Material of the conductor for load-side outgoing feeder	CU
Type of electrical connection of magnet coil	Screw-type terminals
Tightening torque [lbf·in] at magnet coil	18 ... 18 lbf·in
Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded	2x (18 ... 10 AWG)
Temperature of the conductor at magnet coil maximum permissible	75 °C
Material of the conductor at magnet coil	CU

#### Short-circuit current rating

Design of the fuse link for short-circuit protection of the main circuit required	5kA@600V
---	----------

#### Further information

**Industrial Controls - Product Overview (Catalogs, Brochures,...)**

[www.usa.siemens.com/iccatalog](http://www.usa.siemens.com/iccatalog)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:CMFB11277>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**



<https://support.industry.siemens.com/cs/US/en/ps/US2:CMFB11277>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=US2:CMFB11277&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:CMFB11277&lang=en)



**Certificates/approvals**

<https://support.industry.siemens.com/cs/US/en/ps/US2:CMFB11277/certificate>

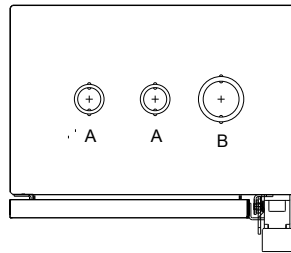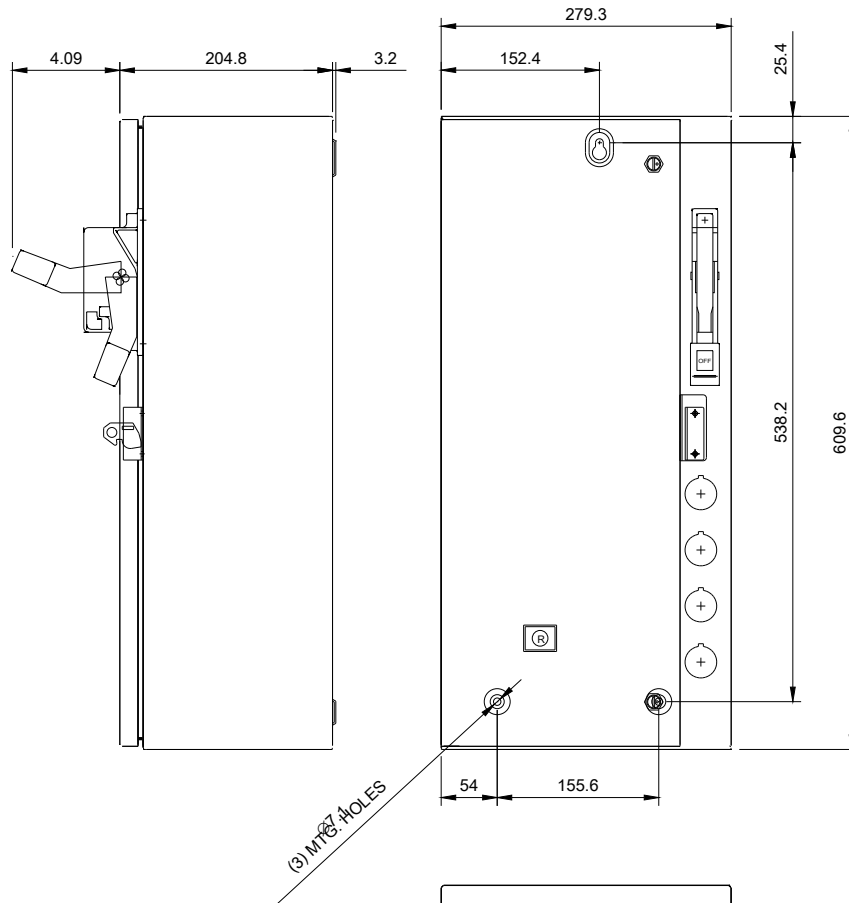

\\LCONDUITS TYP. TOP & BOTTOM

LETTER	CONDUIT SIZE
A	%%C12.7 & %%C19 CONDUIT
B	Ø25.4 & Ø31.8 CONDUIT

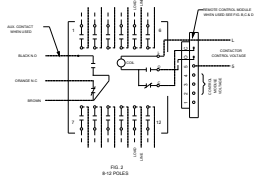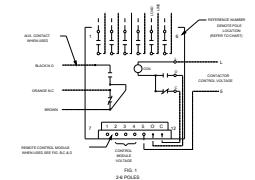

**CONTACT FILE LOCATION CHART**

POLE	LOCATION
1	1 & 1.1
2	2 & 2.1
3	3 & 3.1
4	4 & 4.1
5	5 & 5.1
6	6 & 6.1
7	7 & 7.1
8	8 & 8.1
9	9 & 9.1
10	10 & 10.1
11	11 & 11.1
12	12 & 12.1

**AUXILIARY CONTACT RATINGS**  
 ACC. CLAMPER (SPST)  
 ACC. CLAMPER (SPDT)  
 5A, 250 VAC  
 5A, 250 VDC  
 3A, 250 VAC






**MAIN CONTACT MAINLINE VOLTAGE RATINGS OPEN OR CLOSED**

POLES	1 FOR 1/2 AC	2 FOR 1/2 AC	3 FOR 1/2 AC	4 FOR 1/2 AC	5 FOR 1/2 AC	6 FOR 1/2 AC	7 FOR 1/2 AC	8 FOR 1/2 AC	9 FOR 1/2 AC	10 FOR 1/2 AC	11 FOR 1/2 AC	12 FOR 1/2 AC
250V AC	250 AC	250 AC	250 AC	250 AC	250 AC	250 AC	250 AC	250 AC	250 AC	250 AC	250 AC	250 AC
370V AC	370 AC	370 AC	370 AC	370 AC	370 AC	370 AC	370 AC	370 AC	370 AC	370 AC	370 AC	370 AC
500V AC	500 AC	500 AC	500 AC	500 AC	500 AC	500 AC	500 AC	500 AC	500 AC	500 AC	500 AC	500 AC

**20 AMP. DC GENERAL**  
 250 VDC MAX. 2 POLES IN SERIES  
 250 VDC MAX. 2 POLES IN SERIES

**SWITCH IS SUITABLE FOR USE IN A CIRCUIT**  
 CAPABLE OF INTERRUPTING NOT MORE THAN THE  
 RATED INTERRUPTING CAPACITY AT THE NOMINAL  
 VOLTAGE SHOWN. OVER CURRENT PROTECTION BY  
 A 5 AMP CIRCUIT BREAKER IS RECOMMENDED BY  
 INTERLOCKING SWITCHES OF NOT LESS THAN  
 VOLTAGE SHOWN.

AMPERES	VOLTS
20.000	250
15.000	480
10.000	600

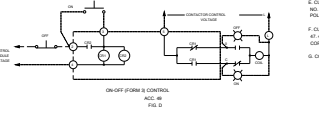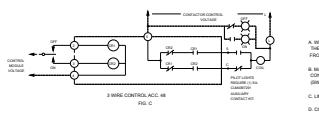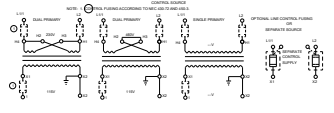

**CONNECTIONS TO CONTROL MODULES**

MODULE TERMINAL	CONNECT TO
1	NOT USED
2	CONTROL SUPPLY FOR ACC. 47 & 48
3	CONTROL SUPPLY FOR ACC. 47 & 48
4	MODULE CONTROL VOLTAGE
5	TERMINAL 1 OF CONTROL MODULE
6	TERMINAL 2 OF CONTROL MODULE
7	TERMINAL 3 OF CONTROL MODULE

\* FOR 24 POLE CONTROL MODULES CONNECT TO TERMINAL 4 TO NEGATIVE (-)

- GENERAL NOTES**
- WHEN CONTACTOR & LINE VOLTAGE ARE THE SAME, THE CONTACTOR CONTROL VOLTAGE LINE SHOULD BE DERIVED FROM THE LINE POLES OF THE CONTACTOR SWITCH.
  - MAIN CONTACTS ARE SHOWN IN OPEN POSITION WITH CONTROL LINE DE-ENERGIZED. SEE RATINGS BELOW SWITCH (SHIPPED WITH CONTACTS CLOSED).
  - LINE & LINE TERMINALS ARE INTERCHANGEABLE.
  - CONTACTS ARE SINGLE THROW DOUBLE BREAK, WITH UNDESIRABLY ENERGIZED SINGLE COIL OPERATOR MECHANICAL FULLY REVERSE OPEN & CLOSED POSITIONS.
  - CUSTOMER CONNECTIONS TO LINE & LOAD WILL ACCEPT 50% SHUNT TO SHUNT CONTACT LINE. TORQUE LINE POLE CONNECTION TO 18 & 19.
  - CUSTOMER CONNECTIONS TO ELECTRONIC MODULES (ACC. 47 & 48) WILL ACCEPT 50% SHUNT TO SHUNT CONTACT LINE. TORQUE CONTROL TERMINALS TO 20 & 21.
  - CONTROL MODULE VOLTAGE SUPPLIED BY CUSTOMER.

24306100401

last modified:

05/20/2019