Electrically held lighting contactor, Contactor amp rating 100A, 0 N.C. / 3 N.O. Poles, 347VAC 60HZ coil, Combination type, 100A/600V non-fuse disconnect, Enclosure NEMA type 12, Dust/drip proof for indoors



Figure similar

Weight [lb]	53 lb
Height x Width x Depth [in]	24 × 20 × 8 in
Protection against electrical shock	NA for enclosed products
Installation altitude [ft] at height above sea level maximum	6560 ft
Ambient temperature [°F] during storage	-67 +176 °F
Ambient temperature [°F] during operation	32 104 °F
Ambient temperature during storage	-55 +80 °C
Ambient temperature during operation	0 40 °C
Country of origin	USA

Contact rating of the main contacts of lighting contactor	
• at tungsten (1 pole per 1 phase) rated value	100A @277V 1p 1ph
at tungsten (2 poles per 1 phase) rated value	100A @480V 2p 1ph
at tungsten (3 poles per 3 phases) rated value	100A @480V 3p 3ph
at ballast (1 pole per 1 phase) rated value	100A @600V 1p 1ph
at ballast (1 poles per 1 phase) rated value at ballast (2 poles per 1 phase) rated value	100A @600V 2p 1ph
at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value	100A @600V 3p 3ph
,	
 at resistive load (1 pole per 1 phase) rated value 	100A @600V 1p 1ph
at resistive load (2 poles per 1 phase) rated	100A @600V 2p 1ph
value	100.11 @ 0001 2p 1p.11
• at resistive load (3 poles per 3 phases) rated	100A @600V 3p 3ph
value	
A 30	
Auxiliary contact	0
Number of NC contacts at contactor for auxiliary contacts	0
Number of NO contacts at contactor for auxiliary	0
contacts	·
Number of total auxiliary contacts maximum	8
Contact rating of auxiliary contacts of contactor	NA
according to UL	
Coil	
Coil Type of voltage of the control supply voltage	AC.
Type of voltage of the control supply voltage	AC
Type of voltage of the control supply voltage Control supply voltage	
Type of voltage of the control supply voltage Control supply voltage • at DC rated value	0 0 V
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value	0 0 V 347 347 V
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value	0 0 V 347 347 V 0 0 V
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC	0 0 V 347 347 V 0 0 V 300 V·A
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated	0 0 V 347 347 V 0 0 V 300 V·A
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder Operating class of the fuse link	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder Operating class of the fuse link Enclosure	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder Operating class of the fuse link Enclosure Degree of protection NEMA rating of the enclosure Design of the housing	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A 0.85 1.1 100A / 600V non-fusible non-fusible NEMA 12 enclosure
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder Operating class of the fuse link Enclosure Degree of protection NEMA rating of the enclosure Design of the housing Mounting/wiring	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder Operating class of the fuse link Enclosure Degree of protection NEMA rating of the enclosure Design of the housing	0 0 V 347 347 V 0 0 V 300 V·A 21 V·A 0.85 1.1

Type of electrical connection for supply voltage line- side	Box lug
Tightening torque [lbf·in] for supply	120 120 lbf·in
Type of connectable conductor cross-sections at line- side at AWG conductors single or multi-stranded	1x (14 1/0 AWG)
Temperature of the conductor for supply maximum permissible	75 °C
Material of the conductor for supply	AL or CU
Type of electrical connection for load-side outgoing feeder	Screw-type terminals
Tightening torque [lbf·in] for load-side outgoing feeder	36 53 lbf·in
Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded	2x (10 1/0 AWG), 1x (10 2/0 AWG)
Temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
Material of the conductor for load-side outgoing feeder	CU
Type of electrical connection of magnet coil	Screw-type terminals
Tightening torque [lbf·in] at magnet coil	7 10 lbf·in
Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded	2x (18 14 AWG)
Temperature of the conductor at magnet coil maximum permissible	75 °C
Material of the conductor at magnet coil	CU

Short-circuit current rating

Design of the fuse link for short-circuit protection of the main circuit required

100kA@600V (Class J)

Further information

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LEDF2E003347B


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/US/en/ps/US2:LEDF2E003347B

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LEDF2E003347B&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:LEDF2E003347B/certificate

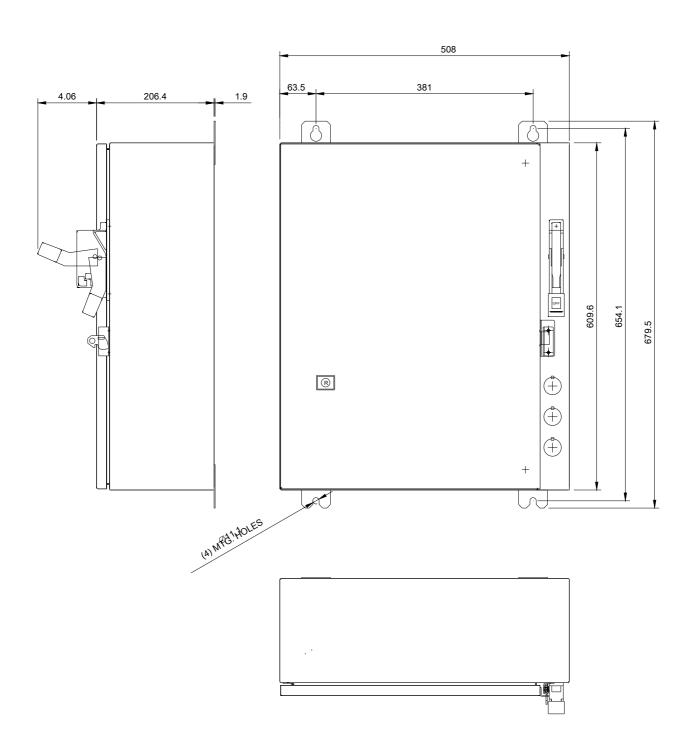

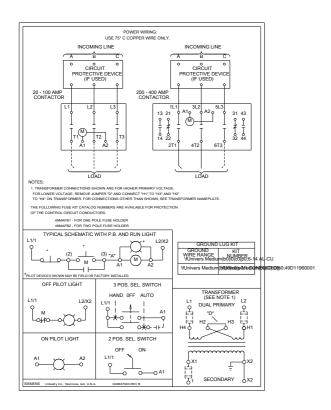

D46637003

last modified: 05/20/2019