SIEMENS

Data sheet

US2:LEFB1B003600B

Electrically held lighting contactor, Contactor amp rating 20A, 0 N.C. / 3 N.O. Poles, 600VAC 60HZ coil, Combination type, 30A/600V fusible disconnect, Enclosure NEMA type 1, Indoor general purpose use



Figure similar

General technical data		
Weight [lb]	39 lb	
Height x Width x Depth [in]	24 × 11 × 8 in	
Protection against electrical shock	NA for enclosed products	
Installation altitude [ft] at height above sea level maximum	6560 ft	
Ambient temperature [°F] during storage	-67 +176 °F	
Ambient temperature [°F] during operation	32 104 °F	
Ambient temperature during storage	-55 +80 °C	
Ambient temperature during operation	0 40 °C	
Country of origin	USA	
Contactor		
Number of NO contacts for main contacts	3	
Number of NC contacts for main contacts	0	

600 V

3000000

contacts typical

Hz maximum

Operating voltage for main current circuit at AC at 60

Mechanical service life (switching cycles) of the main

Contact rating of the main contacts of lighting contactor	
• at tungsten (1 pole per 1 phase) rated value	20A @277V 1p 1ph
at tungsten (2 poles per 1 phase) rated value	20A @480V 2p 1ph
at tungsten (3 poles per 3 phases) rated value	20A @480V 3p 3ph
at ballast (1 pole per 1 phase) rated value	20A @347V 1p 1ph
at ballast (2 poles per 1 phase) rated value at ballast (2 poles per 1 phase) rated value	20A @600V 2p 1ph
at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value	20A @600V 3p 3ph
, , , ,	20A @600V 1p 1ph
 at resistive load (1 pole per 1 phase) rated value 	20A @000V 1p 1p11
at resistive load (2 poles per 1 phase) rated	20A @600V 2p 1ph
value	
• at resistive load (3 poles per 3 phases) rated	20A @600V 3p 3ph
value	
A 111	
Auxiliary contact Number of NC contacts at contactor for auxiliary	0
contacts	U
Number of NO contacts at contactor for auxiliary	1
contacts	
Number of total auxiliary contacts maximum	4
Contact rating of auxiliary contacts of contactor	A600 / Q600
according to UL	
Coil	
Coil Type of voltage of the control supply voltage	AC
Type of voltage of the control supply voltage	AC
	AC 0 0 V
Type of voltage of the control supply voltage Control supply voltage • at DC rated value	
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value	0 0 V
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value	0 0 V 600 600 V 0 0 V
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC	0 0 V 600 600 V 0 0 V 31.7 V·A
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC	0 0 V 600 600 V 0 0 V 31.7 V·A
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder Operating class of the fuse link	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder Operating class of the fuse link Enclosure	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A 0.85 1.1
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder Operating class of the fuse link Enclosure Degree of protection NEMA rating of the enclosure Design of the housing	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A 0.85 1.1 30A / 600V Class R fuse clips Class R
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value at AC at 50 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder Operating class of the fuse link Enclosure Degree of protection NEMA rating of the enclosure	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A 0.85 1.1 30A / 600V Class R fuse clips Class R
Type of voltage of the control supply voltage Control supply voltage at DC rated value at AC at 60 Hz rated value Apparent pick-up power of magnet coil at AC Apparent holding power of magnet coil at AC Operating range factor control supply voltage rated value of magnet coil Disconnect Switch Rated response values of switch disconnector Design of fuse holder Operating class of the fuse link Enclosure Degree of protection NEMA rating of the enclosure Design of the housing Mounting/wiring	0 0 V 600 600 V 0 0 V 31.7 V·A 4.8 V·A 0.85 1.1 30A / 600V Class R fuse clips Class R NEMA 1 enclosure Indoor general purpose use

Type of electrical connection for supply voltage lineside	Box lug
Tightening torque [lbf·in] for supply	35 35 lbf·in
Type of connectable conductor cross-sections at line- side at AWG conductors single or multi-stranded	1x (14 2 AWG)
Temperature of the conductor for supply maximum permissible	75 °C
Material of the conductor for supply	AL or CU
Type of electrical connection for load-side outgoing feeder	Screw-type terminals
Tightening torque [lbf·in] for load-side outgoing feeder	7 12 lbf·in
Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded	2x (20 16 AWG), 2x (18 14 AWG), 2x 12 AWG
Temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
Material of the conductor for load-side outgoing feeder	CU
Type of electrical connection of magnet coil	Screw-type terminals
Tightening torque [lbf·in] at magnet coil	7 10 lbf·in
Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded	2x (20 16 AWG), 2x (18 14 AWG)
Temperature of the conductor at magnet coil maximum permissible	75 °C
Material of the conductor at magnet coil	CU
Type of electrical connection at contactor for auxiliary contacts	Screw-type terminals
Tightening torque [lbf·in] at contactor for auxiliary contacts	7 12 lbf·in
Type of connectable conductor cross-sections at contactor at AWG conductors for auxiliary contacts single or multi-stranded	2x (20 16 AWG), 2x (18 14 AWG)
Temperature of the conductor at contactor for auxiliary contacts maximum permissible	75 °C
Material of the conductor at contactor for auxiliary contacts	CU

Short-circuit current rating

100kA@600V (Class R or J) Design of the fuse link for short-circuit protection of the main circuit required

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog


Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LEFB1B003600B

https://support.industry.siemens.com/cs/US/en/ps/US2:LEFB1B003600B

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LEFB1B0036008&lang=en


Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:LEFB1B003600B/certificate

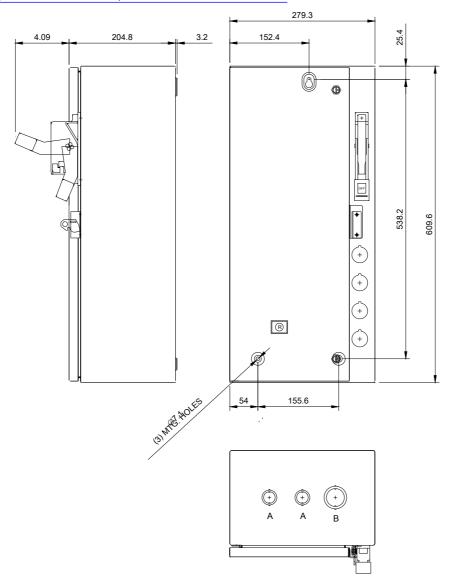

\LCONDUITS TYP. TOP & BOTTOM

LETTER	CONDUIT SIZE
Α	%%C12.7 & %%C19 CONDUIT
В	Ø25 4 & Ø31 8 CONDUIT

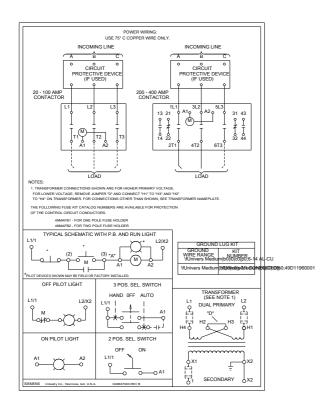

D46637003

last modified: 05/20/2019