



Figure similar

Non-reversing motor starter, Size 0, Three phase full voltage, Solid-state overload relay, OLRelay amp range 5.5-22a, 110V 50HZ / 120V 60HZ coil, Combination type, 30Amp non-fusible disconnect Encl NEMA type 4X 316 S-steel Water/dust tight noncorrosive, Standard width enclosure

| General technical data                                       |                            |
|--|----------------------------|
| Height x Width x Depth [in]                                  | 24 × 11 × 8 in             |
| Protection against electrical shock                          | (NA for enclosed products) |
| Installation altitude [ft] at height above sea level maximum | 6560 ft                    |
| Ambient temperature [°F] during storage                      | -22 ... +149 °F            |
| Ambient temperature [°F] during operation                    | -4 ... +104 °F             |
| Ambient temperature during storage                           | -30 ... +65 °C             |
| Ambient temperature during operation                         | -20 ... +40 °C             |

| Horsepower ratings   |      |
|--|------|
| Yielded mechanical performance [hp] for three-phase AC motor |      |
| • at 200/208 V rated value                                   | 3 hp |
| • at 220/230 V rated value                                   | 3 hp |
| • at 460/480 V rated value                                   | 0 hp |
| • at 575/600 V rated value                                   | 0 hp |

| Contactor |
|-----------|
|-----------|

|   |          |
|---|----------|
| Number of NO contacts for main contacts                                 | 3        |
| Operating current at AC at 600 V rated value                            | 18 A     |
| Mechanical service life (switching cycles) of the main contacts typical | 10000000 |

#### Auxiliary contact

|   |                                     |
|---|-------------------------------------|
| Number of NC contacts at contactor for auxiliary contacts         | 0                                   |
| Number of NO contacts at contactor for auxiliary contacts         | 1                                   |
| Number of total auxiliary contacts maximum                        | 8                                   |
| Contact rating of auxiliary contacts of contactor according to UL | 10A@600VAC (A600), 5A@600VDC (P600) |

#### Coil

|  |   |
|--|---|
| Type of voltage of the control supply voltage  | AC  |
| Control supply voltage <ul style="list-style-type: none"> <li>• at DC rated value</li> <li>• at AC at 60 Hz rated value</li> <li>• at AC at 50 Hz rated value</li> </ul> | 0 ... 0 V<br>120 ... 120 V<br>110 ... 110 V |
| Holding power at AC minimum  | 8.6 W                                       |
| Apparent pick-up power of magnet coil at AC  | 218 V·A                                     |
| Apparent holding power of magnet coil at AC  | 25 V·A                                      |
| Operating range factor control supply voltage rated value of magnet coil   | 0.85 ... 1.1                                |
| Percental drop-out voltage of magnet coil related to the input voltage   | 50 %  |
| Switch-on delay time   | 19 ... 29 ms                                |
| Off-delay time   | 10 ... 24 ms                                |

#### Overload relay

|   |  |
|---|--|
| Product function <ul style="list-style-type: none"> <li>• Overload protection</li> <li>• Phase failure detection</li> <li>• Phase unbalance</li> <li>• Ground fault detection</li> <li>• Test function</li> <li>• External reset</li> </ul> | Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes |
| Reset function  | Manual, automatic and remote           |
| (trip class)  | Class 5 / 10 / 20 (factory set) / 30   |
| Adjustable pick-up value current of the current-dependent overload release  | 5.5 ... 22 A                           |
| Make time with automatic start after power failure maximum  | 3 s                                    |
| Relative repeat accuracy  | 1 %                                    |

|  |                                    |
|--|------------------------------------|
| Product feature Protective coating on printed-circuit board  | Yes                                |
| Number of NC contacts of auxiliary contacts of overload relay  | 1                                  |
| Number of NO contacts of auxiliary contacts of overload relay  | 1                                  |
| Operating current of auxiliary contacts of overload relay <ul style="list-style-type: none"> <li>• at AC at 600 V</li> <li>• at DC at 250 V</li> </ul>                       | 5 A<br>1 A                         |
| Contact rating of auxiliary contacts of overload relay according to UL   | 5A@600VAC (B600), 1A@250VDC (R300) |
| Insulation voltage <ul style="list-style-type: none"> <li>• with single-phase operation at AC rated value</li> <li>• with multi-phase operation at AC rated value</li> </ul> | 600 V<br>300 V                     |

#### Disconnect Switch

|  |             |
|--|-------------|
| Rated response values of switch disconnecter | 30A / 600V  |
| Design of fuse holder                        | non-fusible |
| Operating class of the fuse link             | non-fusible |

#### Mounting/wiring

|   |                                   |
|---|-----------------------------------|
| (mounting position)   | vertical                          |
| (mounting type)   | Surface mounting and installation |
| Type of electrical connection for supply voltage line-side  | Box lug                           |
| Tightening torque [lbf·in] for supply   | 35 ... 35 lbf·in                  |
| Type of connectable conductor cross-sections at line-side at AWG conductors single or multi-stranded                  | 1x (14 ... 2 AWG)                 |
| Temperature of the conductor for supply maximum permissible   | 75 °C                             |
| Material of the conductor for supply  | AL or CU                          |
| Type of electrical connection for load-side outgoing feeder   | Screw-type terminals              |
| Tightening torque [lbf·in] for load-side outgoing feeder  | 20 ... 20 lbf·in                  |
| Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded | 1x (14 ... 2 AWG)                 |
| Temperature of the conductor for load-side outgoing feeder maximum permissible  | 75 °C                             |
| Material of the conductor for load-side outgoing feeder   | AL or CU                          |
| Type of electrical connection of magnet coil  | Screw-type terminals              |
| Tightening torque [lbf·in] at magnet coil   | 5 ... 12 lbf·in                   |

|  |   |
|--|---|
| Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded                           | 2x (16 ... 12 AWG)                                  |
| Temperature of the conductor at magnet coil maximum permissible  | 75 °C   |
| Material of the conductor at magnet coil   | CU  |
| Type of electrical connection for auxiliary contacts   | Screw-type terminals                                |
| Tightening torque [lbf·in] at contactor for auxiliary contacts   | 10 ... 15 lbf·in                                    |
| Type of connectable conductor cross-sections at contactor at AWG conductors for auxiliary contacts single or multi-stranded      | 1x (12 AWG), 2x (16 ... 14 AWG), 2x (18 ... 16 AWG) |
| Temperature of the conductor at contactor for auxiliary contacts maximum permissible   | 75 °C   |
| Material of the conductor at contactor for auxiliary contacts  | CU  |
| Type of electrical connection at overload relay for auxiliary contacts   | Screw-type terminals                                |
| Tightening torque [lbf·in] at overload relay for auxiliary contacts  | 7 ... 10 lbf·in                                     |
| Type of connectable conductor cross-sections at overload relay at AWG conductors for auxiliary contacts single or multi-stranded | 2x (20 ... 14 AWG)                                  |
| Temperature of the conductor at overload relay for auxiliary contacts maximum permissible  | 75 °C   |
| Material of the conductor at overload relay for auxiliary contacts   | CU  |

#### Short-circuit current rating

|   |   |
|---|---|
| Design of the fuse link for short-circuit protection of the main circuit required | 10kA@600V (Class H or K); 100kA@600V (Class R or J) |
|---|---|

#### Further information

**Industrial Controls - Product Overview (Catalogs, Brochures,...)**

[www.usa.siemens.com/iccatalog](http://www.usa.siemens.com/iccatalog)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:17CUD92XF>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/US/en/ps/US2:17CUD92XF>


**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=US2:17CUD92XF&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:17CUD92XF&lang=en)

**Certificates/approvals**

<https://support.industry.siemens.com/cs/US/en/ps/US2:17CUD92XF/certificate>

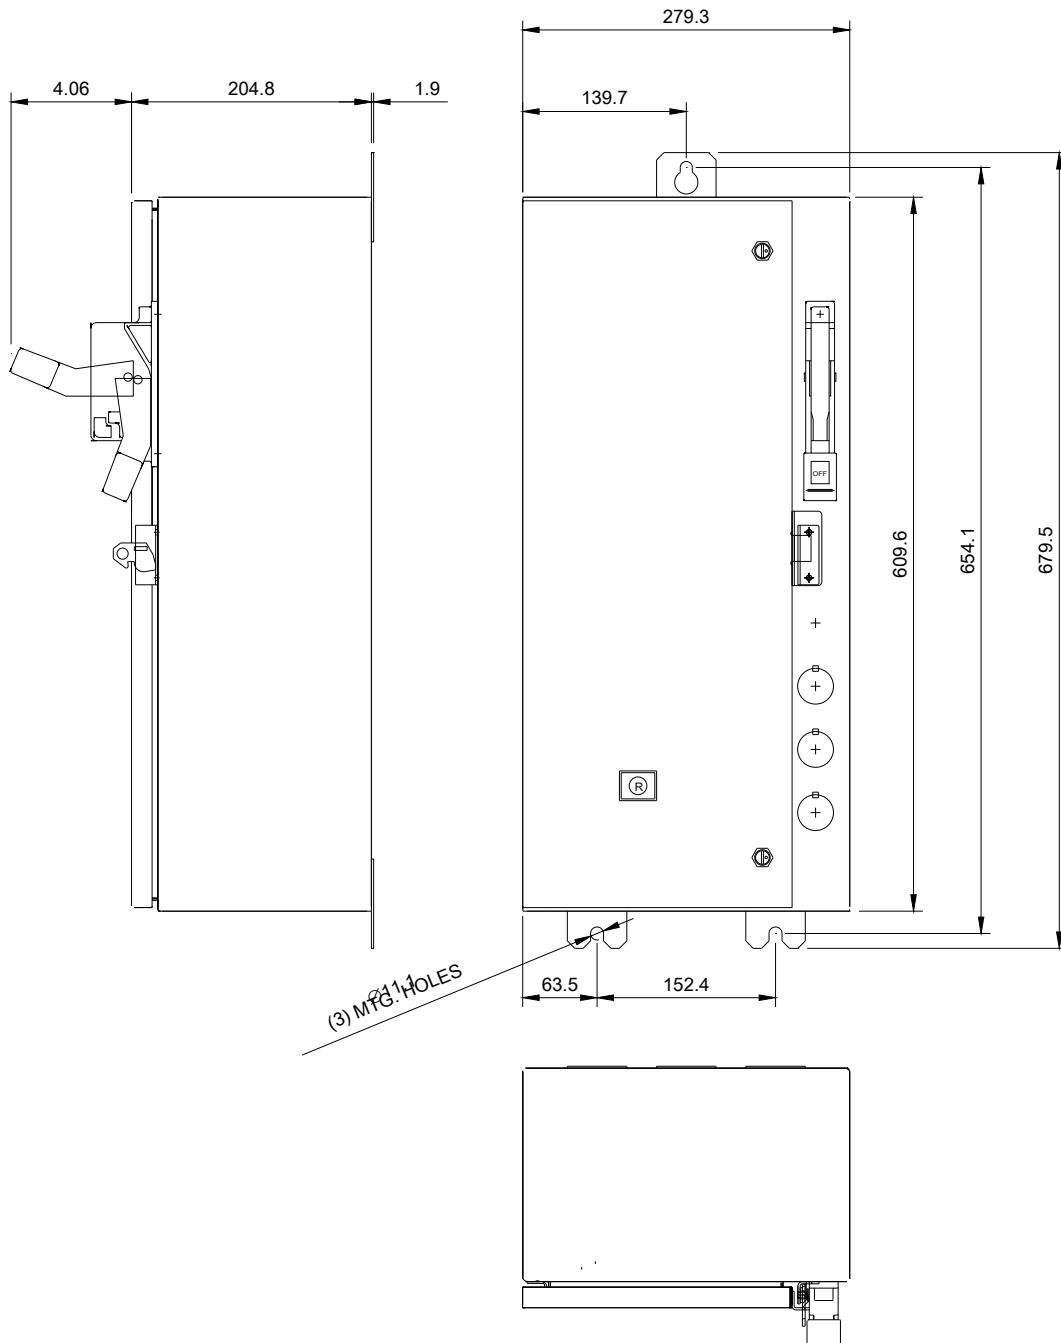

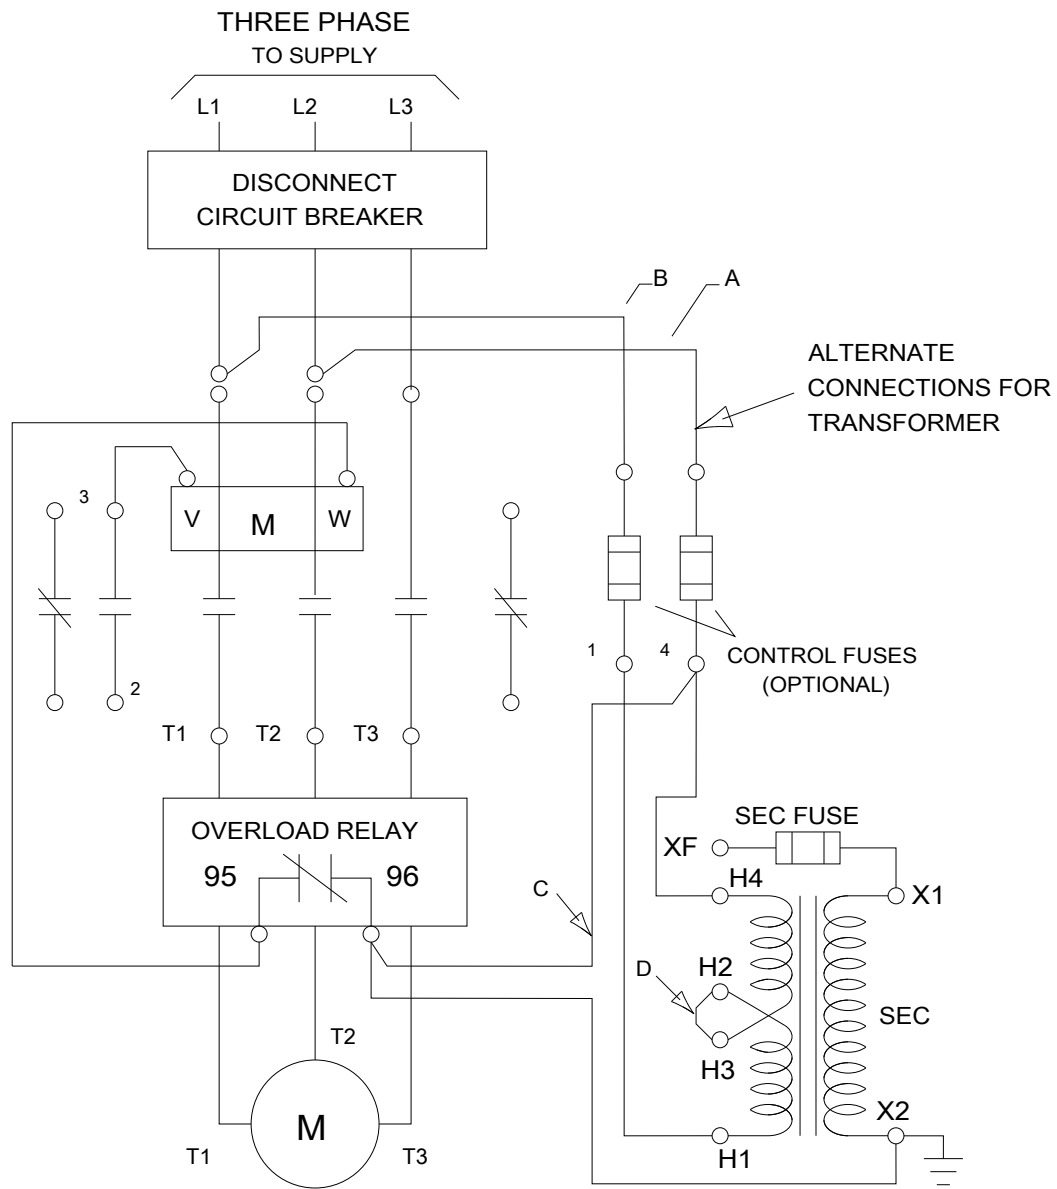

D68782001

last modified:

05/08/2019