

Mechanically held lighting contactor, Contactor amp rating 200Amp  
 0NC \_ 5NO poles, 24VAC 60HZ coil, Non-combination type,  
 Enclosure NEMA type open, No enclosure



Figure similar

| General technical data  |  |
|---|--|
| Weight [lb]   | 29 lb                                  |
| Height x Width x Depth [in]   | 7.51 × 6.86 × 6.98 in                  |
| Protection against electrical shock   | Not finger-safe                        |
| Installation altitude [ft] at height above sea level maximum  | 6560 ft                                |
| Country of origin   | USA                                    |
| Contactor   |  |
| Number of NO contacts for main contacts   | 5                                      |
| Number of NC contacts for main contacts   | 0                                      |
| Operating voltage for main current circuit at AC at 60 Hz maximum   | 600 V                                  |
| Mechanical service life (switching cycles) of the main contacts typical   | 5000000                                |
| Contact rating of the main contacts of lighting contactor   |  |
| <ul style="list-style-type: none"> <li>at tungsten (1 pole per 1 phase) rated value</li> <li>at tungsten (2 poles per 1 phase) rated value</li> </ul> | 200A @277V 1p 1ph<br>200A @480V 2p 1ph |

- at tungsten (3 poles per 3 phases) rated value 200A @480V 3p 3ph
- at ballast (1 pole per 1 phase) rated value 200A @347V 1p 1ph
- at ballast (2 poles per 1 phase) rated value 200A @600V 2p 1ph
- at ballast (3 poles per 3 phases) rated value 200A @600V 3p 3ph
- at resistive load (1 pole per 1 phase) rated value 200A @347V 1p 1ph
- at resistive load (2 poles per 1 phase) rated value 200A @600V 2p 1ph
- at resistive load (3 poles per 3 phases) rated value 200A @600V 3p 3ph

#### Auxiliary contact

|   |    |
|---|----|
| Number of NC contacts for auxiliary contacts                      | 0  |
| Number of NO contacts for auxiliary contacts                      | 0  |
| Number of total auxiliary contacts maximum                        | 4  |
| Contact rating of auxiliary contacts of contactor according to UL | NA |

#### Coil

|  |              |
|--|--------------|
| Type of voltage of the control supply voltage                            | AC           |
| Control supply voltage   |              |
| • at DC rated value  | 0 ... 0 V    |
| • at AC at 60 Hz rated value   | 24 ... 24 V  |
| • at AC at 50 Hz rated value   | 0 ... 0 V    |
| Apparent pick-up power of magnet coil at AC                              | 1300 V·A     |
| Apparent holding power of magnet coil at AC                              | 130 V·A      |
| Operating range factor control supply voltage rated value of magnet coil | 0.85 ... 1.1 |

#### Enclosure

|   |                            |
|---|----------------------------|
| Degree of protection NEMA rating of the enclosure | Open device (no enclosure) |
| Design of the housing                             | NA                         |

#### Mounting/wiring

|  |                                   |
|--|-----------------------------------|
| (mounting position)  | Vertical                          |
| (mounting type)  | Surface mounting and installation |
| Type of electrical connection for supply voltage line-side   | Box lug                           |
| Tightening torque [lbf·in] for supply  | 275 ... 300 lbf·in                |
| Type of connectable conductor cross-sections at line-side at AWG conductors single or multi-stranded | 1x (4 AWG ... 300 kcmil)          |
| Temperature of the conductor for supply maximum permissible  | 75 °C                             |
| Material of the conductor for supply   | AL or CU                          |
| Type of electrical connection for load-side outgoing feeder  | Box lug                           |

|   |                          |
|---|--------------------------|
| Tightening torque [lbf·in] for load-side outgoing feeder  | 275 ... 300 lbf·in       |
| Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded | 1x (4 AWG ... 300 kcmil) |
| Temperature of the conductor for load-side outgoing feeder maximum permissible  | 75 °C                    |
| Material of the conductor for load-side outgoing feeder   | AL or CU                 |
| Type of electrical connection of magnet coil  | Screw-type terminals     |
| Tightening torque [lbf·in] at magnet coil   | 8 ... 12 lbf·in          |
| Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded                | 2x (16 ... 12 AWG)       |
| Temperature of the conductor at magnet coil maximum permissible   | 75 °C                    |
| Material of the conductor at magnet coil  | CU                       |

### Short-circuit current rating

|  |                                  |
|--|----------------------------------|
| Design of the fuse link for short-circuit protection of the main circuit required  | none                             |
| Design of the short-circuit trip   | Thermal magnetic circuit breaker |
| Maximum short-circuit current breaking capacity (Icu) <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 480 V</li> <li>• at 600 V</li> </ul> | 10 kA<br>10 kA<br>10 kA          |

### Further information

**Industrial Controls - Product Overview (Catalogs, Brochures,...)**

[www.usa.siemens.com/iccatalog](http://www.usa.siemens.com/iccatalog)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:CLM0F05024>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/US/en/ps/US2:CLM0F05024>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=US2:CLM0F05024&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:CLM0F05024&lang=en)

**Certificates/approvals**

<https://support.industry.siemens.com/cs/US/en/ps/US2:CLM0F05024/certificate>

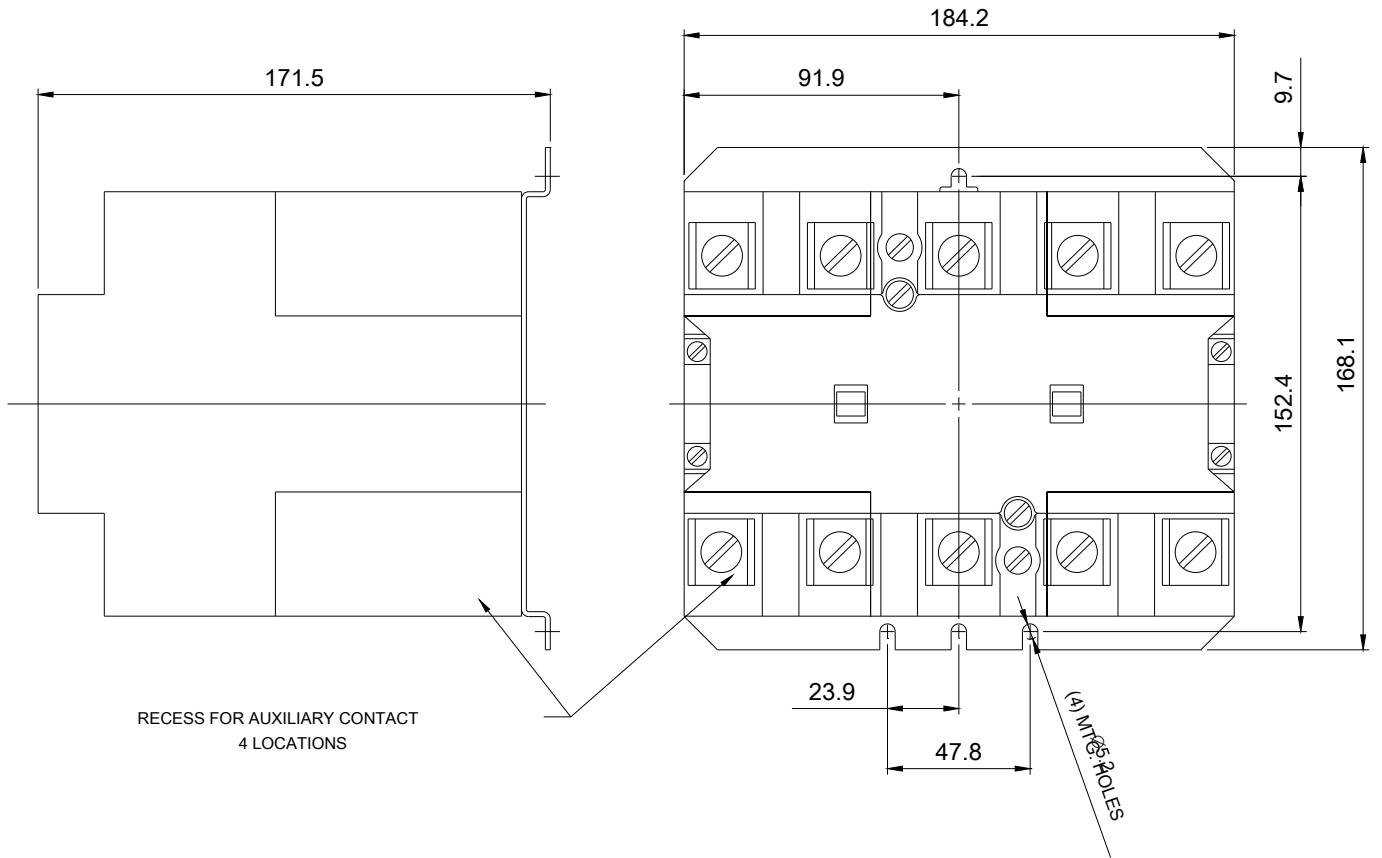

Wiring Diagram Class CLM  
30-200 Amp 2, 3, 4 and 5 Pole



Notes:

1. Dotted lines represent additional poles.  
Contactor may have 2, 3, 4 or 5 poles.
2. Optional auxiliary contacts are not shown.

E87010-A0410-T009-A1-CLM-1

last modified:

05/20/2019