

Mechanically held lighting contactor, Contactor amp rating 60Amp  
0NC \_ 8NO poles, 220VAC 50HZ / 240VAC 60HZ coil Non-  
combination type, Enclosure NEMA type 1, Indoor general purpose  
use



Figure similar

| General technical data  |                          |
|---|--------------------------|
| Weight [lb]   | 20 lb                    |
| Height x Width x Depth [in]   | 16 × 17 × 8 in           |
| Protection against electrical shock                                     | NA for enclosed products |
| Installation altitude [ft] at height above sea level maximum            | 6560 ft                  |
| Country of origin   | USA                      |
| Contactor   |                          |
| Number of NO contacts for main contacts                                 | 8                        |
| Number of NC contacts for main contacts                                 | 0                        |
| Operating voltage for main current circuit at AC at 60 Hz maximum       | 600 V                    |
| Mechanical service life (switching cycles) of the main contacts typical | 10000000                 |
| Contact rating of the main contacts of lighting contactor               |                          |
| • at tungsten (1 pole per 1 phase) rated value                          | 60A @277V 1p 1ph         |
| • at tungsten (2 poles per 1 phase) rated value                         | 60A @480V 2p 1ph         |

- at tungsten (3 poles per 3 phases) rated value
- at ballast (1 pole per 1 phase) rated value
- at ballast (2 poles per 1 phase) rated value
- at ballast (3 poles per 3 phases) rated value
- at resistive load (1 pole per 1 phase) rated value
- at resistive load (2 poles per 1 phase) rated value
- at resistive load (3 poles per 3 phases) rated value

60A @480V 3p 3ph  
 60A @347V 1p 1ph  
 60A @600V 2p 1ph  
 60A @600V 3p 3ph  
 60A @347V 1p 1ph  
 60A @600V 2p 1ph  
 60A @600V 3p 3ph

#### Auxiliary contact

|   |    |
|---|----|
| Number of NC contacts for auxiliary contacts                      | 0  |
| Number of NO contacts for auxiliary contacts                      | 0  |
| Number of total auxiliary contacts maximum                        | 4  |
| Contact rating of auxiliary contacts of contactor according to UL | NA |

#### Coil

|  |               |
|--|---------------|
| Type of voltage of the control supply voltage                            | AC            |
| Control supply voltage   |               |
| • at DC rated value  | 0 ... 0 V     |
| • at AC at 60 Hz rated value   | 240 ... 240 V |
| • at AC at 50 Hz rated value   | 220 ... 220 V |
| Apparent pick-up power of magnet coil at AC                              | 1200 V·A      |
| Apparent holding power of magnet coil at AC                              | 80 V·A        |
| Operating range factor control supply voltage rated value of magnet coil | 0.85 ... 1.1  |

#### Enclosure

|   |                            |
|---|----------------------------|
| Degree of protection NEMA rating of the enclosure | NEMA 1 enclosure           |
| Design of the housing                             | Indoor general purpose use |

#### Mounting/wiring

|  |                                   |
|--|-----------------------------------|
| (mounting position)  | Vertical                          |
| (mounting type)  | Surface mounting and installation |
| Type of electrical connection for supply voltage line-side   | Box lug                           |
| Tightening torque [lbf·in] for supply  | 45 ... 50 lbf·in                  |
| Type of connectable conductor cross-sections at line-side at AWG conductors single or multi-stranded | 1x (14 ... 4 AWG)                 |
| Temperature of the conductor for supply maximum permissible  | 75 °C                             |
| Material of the conductor for supply   | AL or CU                          |
| Type of electrical connection for load-side outgoing feeder  | Box lug                           |

|   |                      |
|---|----------------------|
| Tightening torque [lbf·in] for load-side outgoing feeder  | 45 ... 50 lbf·in     |
| Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded | 1x (14 ... 4 AWG)    |
| Temperature of the conductor for load-side outgoing feeder maximum permissible  | 75 °C                |
| Material of the conductor for load-side outgoing feeder   | AL or CU             |
| Type of electrical connection of magnet coil  | Screw-type terminals |
| Tightening torque [lbf·in] at magnet coil   | 8 ... 12 lbf·in      |
| Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded                | 2x (16 ... 12 AWG)   |
| Temperature of the conductor at magnet coil maximum permissible   | 75 °C                |
| Material of the conductor at magnet coil  | CU                   |

#### Short-circuit current rating

|  |                                  |
|--|----------------------------------|
| Design of the fuse link for short-circuit protection of the main circuit required  | none                             |
| Design of the short-circuit trip   | Thermal magnetic circuit breaker |
| Maximum short-circuit current breaking capacity (Icu) <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 480 V</li> <li>• at 600 V</li> </ul> | 5 kA<br>5 kA<br>5 kA             |

#### Further information

**Industrial Controls - Product Overview (Catalogs, Brochures,...)**

[www.usa.siemens.com/iccatalog](http://www.usa.siemens.com/iccatalog)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:CLM1D08240>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/US/en/ps/US2:CLM1D08240>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=US2:CLM1D08240&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:CLM1D08240&lang=en)

**Certificates/approvals**

<https://support.industry.siemens.com/cs/US/en/ps/US2:CLM1D08240/certificate>

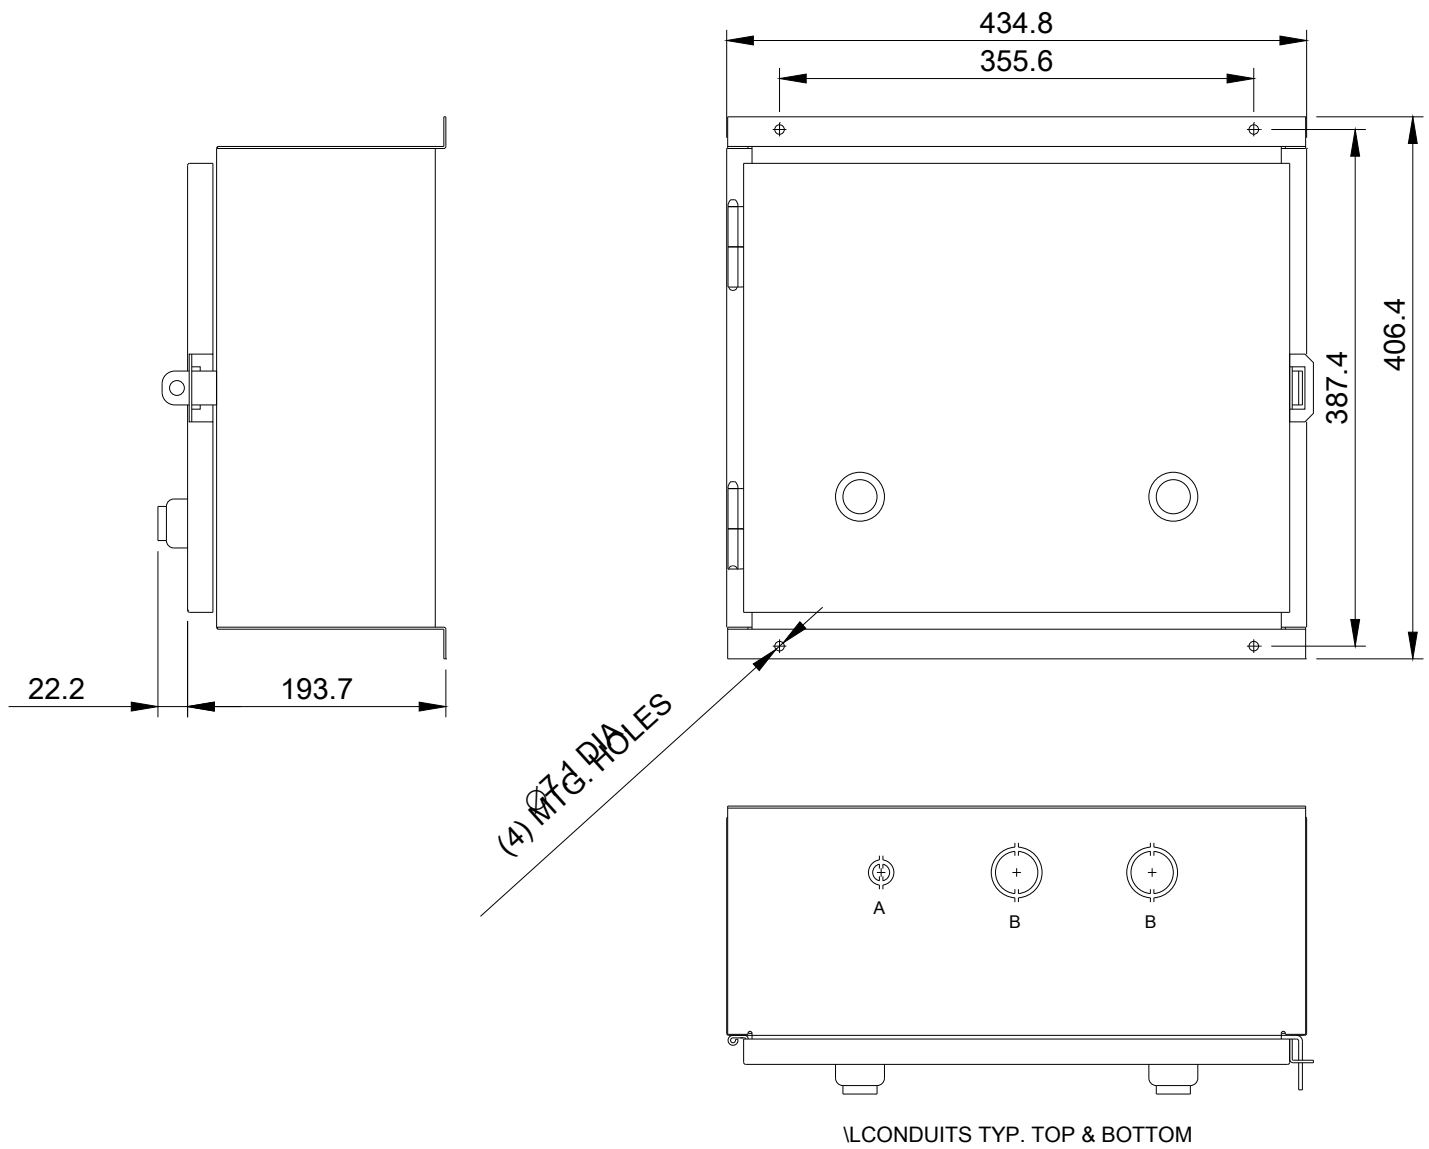

| LETTER | CONDUIT SIZE          |
|--------|-----------------------|
| A      | Ø12.7 & Ø19 CONDUIT   |
| B      | Ø31.8 & Ø38.1 CONDUIT |

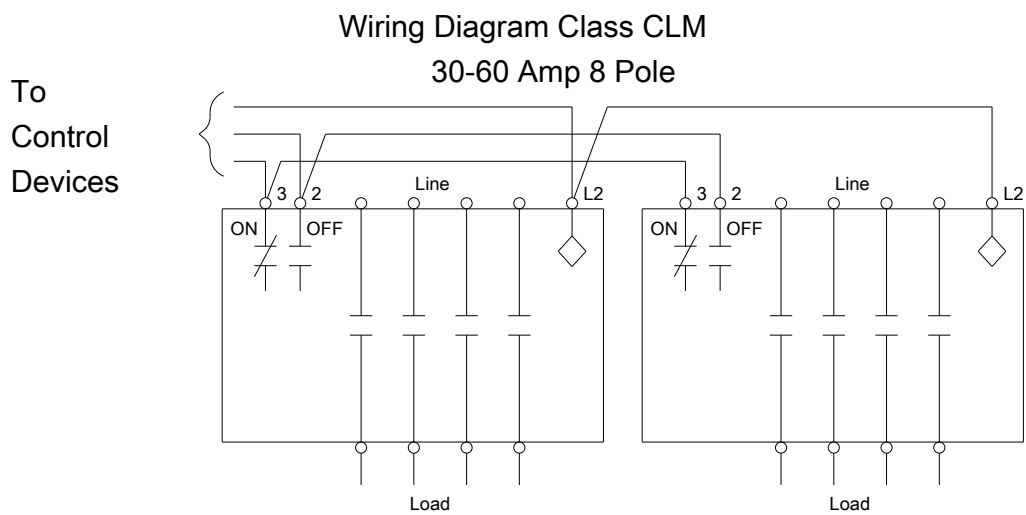

E87010-A0410-T009-A1-CLM-3

last modified:

05/20/2019