

## Modular Enclosures For Flange-Mounted Disconnects

### Application -

Can be bolted together in any desired multiple door arrangement for maximum versatility. Slave enclosures can be added or removed as required.

Designed to house most standard type disconnect. For installation information, consult our Installation Manual at [www.saginawcontrol.com](http://www.saginawcontrol.com).

### Construction -

- 0.125" carbon steel.
- Seams continuously welded and ground smooth.
- Body stiffeners for extra rigidity.
- Door and side openings are flanged to provide extra strength and smooth edges.
- Flange trough collar around all sides of door opening.
- Heavy duty lifting eyes anchor into reinforced top.
- Concealed hinge.
- Removable and interchangeable doors.
- Black zinc die cast coinproof/padlocking handle on main door of disconnect enclosures. Black zinc die cast padlocking handle on all other doors.
- 3-point latching mechanism.
- Ramp shoes on ends of latch rods for easier door closing.
- Panel supports.
- Large removable print pockets.
- Oil-resistant door gasket.
- Removable panels mount on collar studs.
- Mechanical interlock standard on each enclosure. Parts required to connect interlock system between adjacent enclosures are provided.
- Ground stud on door and body.

### Finish -

ANSI-61 gray finish inside and out. Panels are powder coated white.

### IS1 - Industry Standards -

NEMA Type 12 & Type 13  
UL Listed Type 12  
CSA Type 12  
IEC 60529 IP 55

### Note -

- Disconnect ordered separately.
- SCE-MODGK sold separately, required when bolting one enclosure to another.
- Part numbers ending with "G" indicate a galvanized sub-panel installed.

## MODULAR ENCLOSURES

### SINGLE-DOOR DISCONNECT ENCLOSURE (LEFT SIDE OPEN)

ENCLOSURE PRODUCT CODE A2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-MOD72X4018	72.00	40.00	18.00	IS1	1,693.58	SCE-64P37*	60.00	33.75	Included
SCE-MOD84X4018	84.00	40.00	18.00	IS1	1,883.48	SCE-76P37*	72.00	33.75	Included
SCE-MOD84X4024	84.00	40.00	24.00	IS1	2,054.27	SCE-76P37*	72.00	33.75	Included

### TWO-DOOR DISCONNECT ENCLOSURE (LEFT SIDE OPEN)

ENCLOSURE PRODUCT CODE A2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-MOD72X7818	72.00	78.00	18.00	IS1	3,063.50	SCE-64P76*	60.00	72.00	Included
SCE-MOD84X7818	84.00	78.00	18.00	IS1	3,397.91	SCE-76P76*	72.00	72.00	Included
SCE-MOD84X7818G	84.00	78.00	18.00	IS1	3,509.74	SCE-76P76GALV*	72.00	72.00	Included
SCE-MOD84X7824	84.00	78.00	24.00	IS1	3,629.61	SCE-76P76*	72.00	72.00	Included

### SINGLE-DOOR SLAVE ENCLOSURE (BOTH SIDES OPEN)


ENCLOSURE PRODUCT CODE A2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-MOD724018	72.00	40.00	18.00	IS1	1,672.08	SCE-64P37*	60.00	33.75	Included
SCE-MOD844018	84.00	40.00	18.00	IS1	1,859.60	SCE-76P37*	72.00	33.75	Included
SCE-MOD844018G	84.00	39.50	18.00	IS1	1,909.60	SCE-76P37GALV*	72.00	33.75	Included
SCE-MOD844024	84.00	40.00	24.00	IS1	2,030.39	SCE-76P37*	72.00	33.75	Included

### TWO-DOOR SLAVE ENCLOSURE (BOTH SIDES OPEN)

ENCLOSURE PRODUCT CODE A2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-MOD727718	72.00	77.00	18.00	IS1	3,042.00	SCE-64P76*	60.00	72.00	Included
SCE-MOD847718	84.00	77.00	18.00	IS1	3,374.03	SCE-76P76*	72.00	72.00	Included
SCE-MOD847718G	84.00	77.00	18.00	IS1	3,632.84	SCE-76P76GALV*	72.00	72.00	Included
SCE-MOD847724	84.00	77.00	24.00	IS1	3,603.34	SCE-76P76*	72.00	72.00	Included


Part numbers ending in "G" have galvanized sub-panels installed.

\* Sub-panel included with enclosure. Replacement plates can be ordered. Prices found in the accessory section.

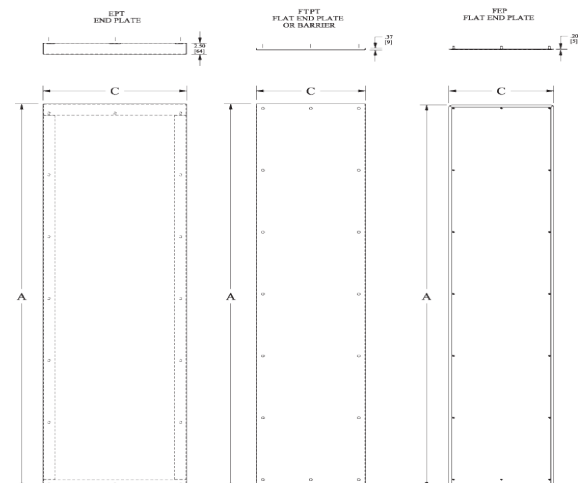

# MODULAR ENCLOSURES TECHNICAL DATA


## SINGLE-DOOR MODULAR ENCLOSURE WITH DISCONNECT (LEFT SIDE OPEN)

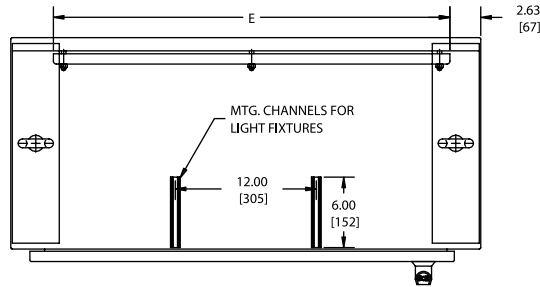

Flange trough collar (ftc) around all sides of door opening.

SECTION A-A

F=11.88 [302] WHEN A=72.00 [1829]  
F=17.38 [441] WHEN A=84.00 [2134]


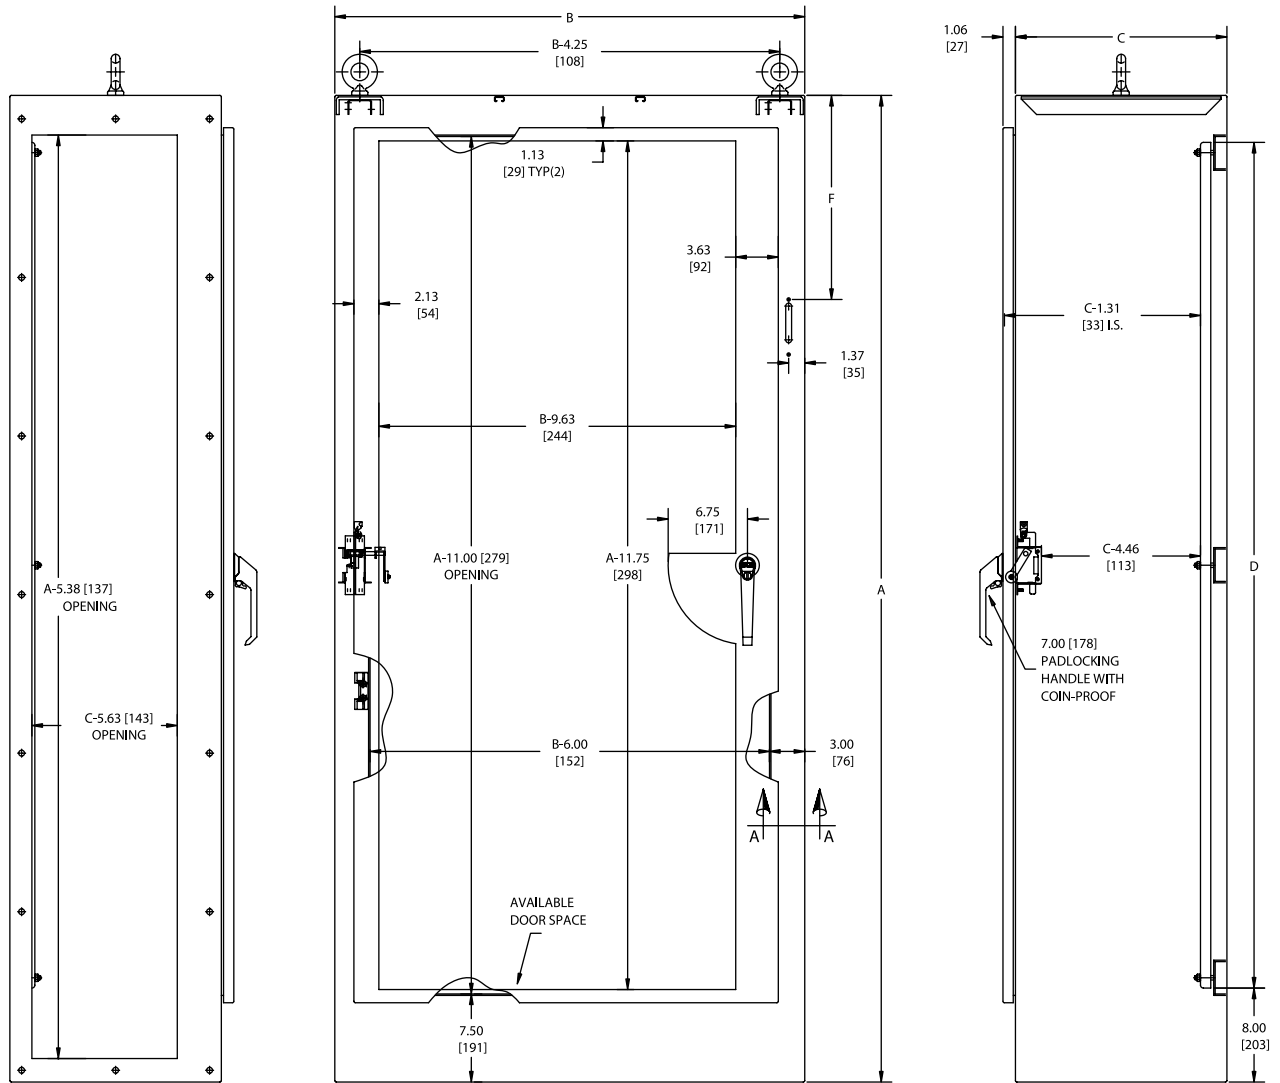


Phone (989) 799-6871  
Fax (989) 799-4524



# MODULAR ENCLOSURES TECHNICAL DATA

## TWO-DOOR MODULAR ENCLOSURE WITH DISCONNECT (LEFT SIDE OPEN)


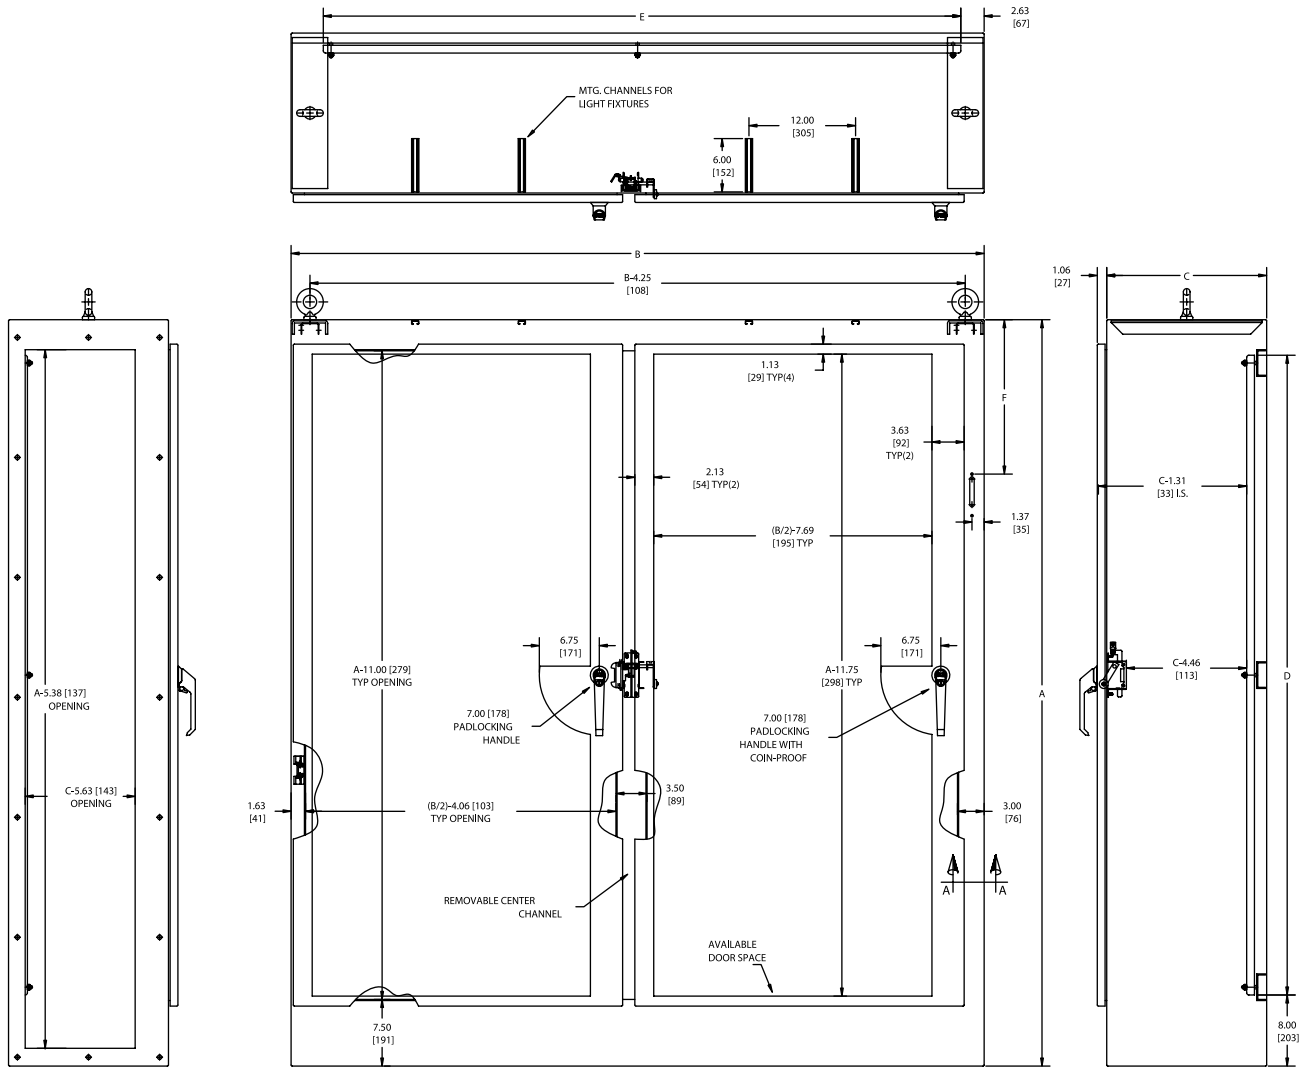


SECTION A-A

F=11.88 [302] WHEN A=72.00 [1829]  
F=17.38 [441] WHEN A=84.00 [2134]

# MODULAR ENCLOSURES TECHNICAL DATA

## SINGLE-DOOR SLAVE ENCLOSURE (BOTH SIDES OPEN)

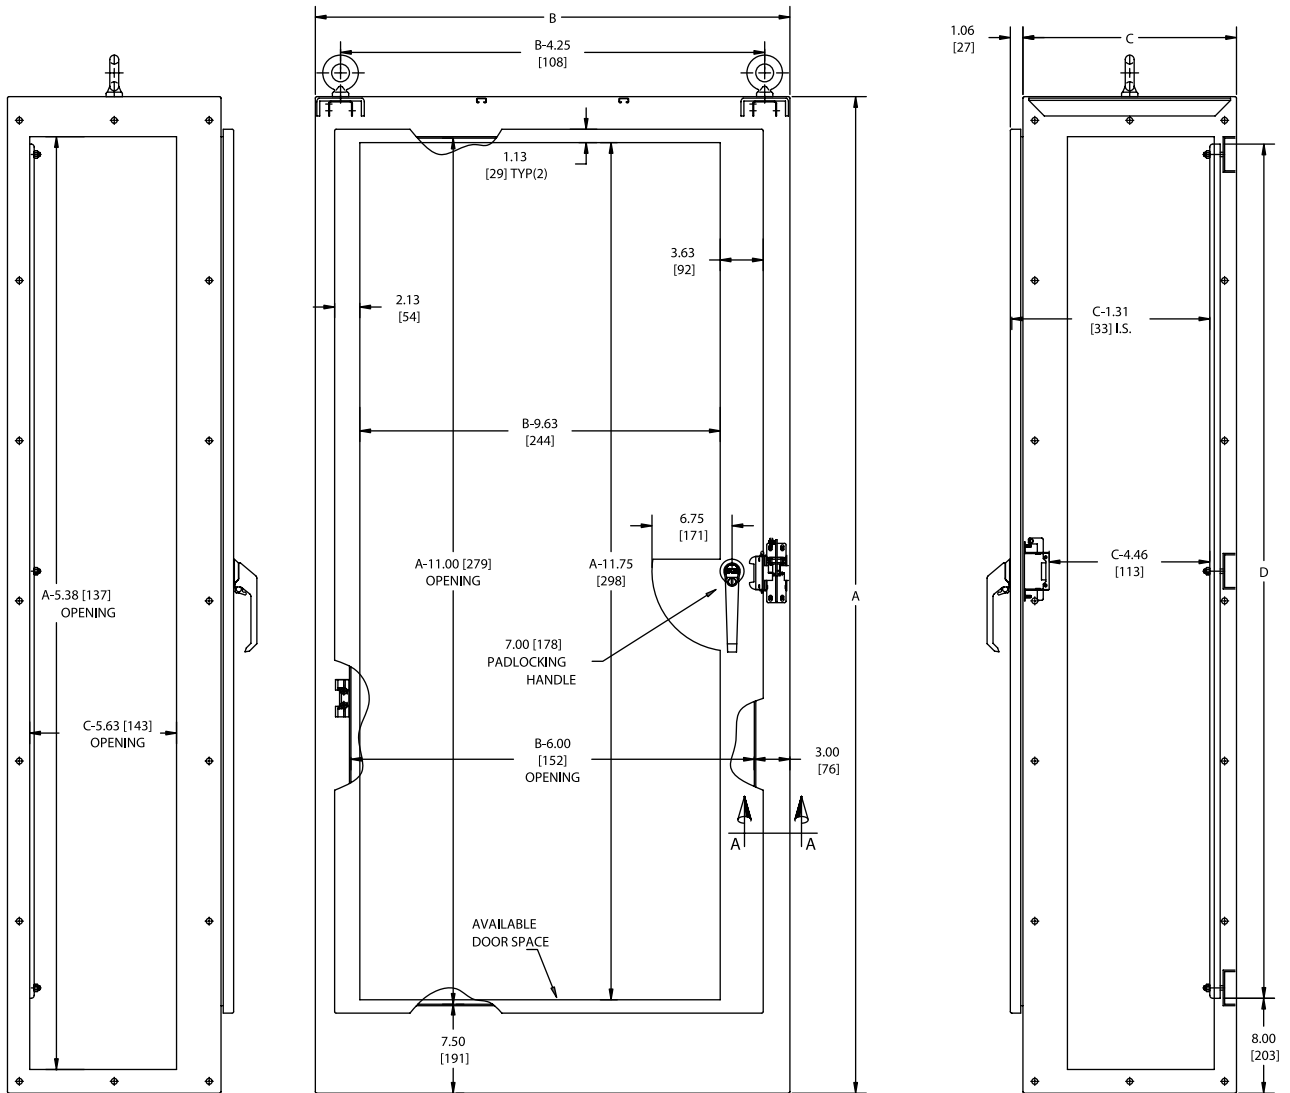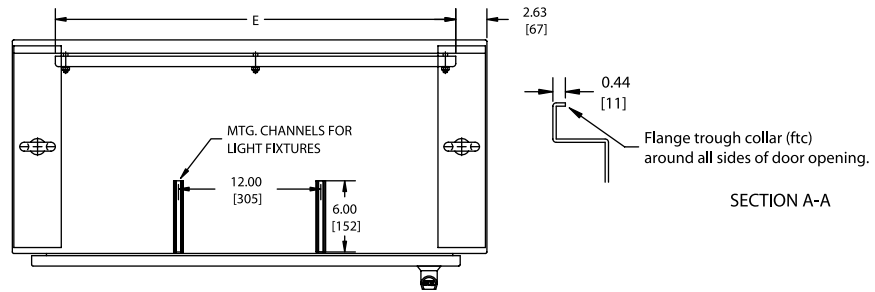

# MODULAR ENCLOSURES TECHNICAL DATA

## TWO-DOOR SLAVE ENCLOSURE (BOTH SIDES OPEN)

