

## 304 & 316 Stainless Steel Continuous Hinge Enclosures

### Application -

Designed for use as electrical junction boxes, terminal wiring boxes, instrument housings, and electrical control enclosures. For use in wet and hosed down areas and in corrosive atmospheres. For installation information, consult our Installation Manual at [www.saginawcontrol.com](http://www.saginawcontrol.com).

### Construction -

- 0.075" stainless steel Type 304 & 316/316L
- Seams continuously welded and ground smooth.
- Oil-resistant door gasket.
- Ground stud on door.
- Stainless steel continuous hinge.
- Standoffs provided for mounting optional sub-panels.

### Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

### IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13  
UL Listed Type 4, 4X & 12  
CSA Type 4, 4X & 12  
IEC 60529 IP66



## 304 STAINLESS STEEL CONTINUOUS HINGE ENCLOSURES

ENCLOSURE PRODUCT CODE S1						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-6044CHNFSS	6.00	4.00	4.00	IS5	176.45	SCE-6P4	4.88	2.88	3.01
SCE-606CHNFSS	6.00	6.00	4.00	IS5	220.89	SCE-6P6	4.88	4.88	3.61
SCE-8064CHNFSS	8.00	6.00	4.00	IS5	229.90	SCE-8P6	6.75	4.88	4.17
SCE-1008CHNFSS	10.00	8.00	4.00	IS5	332.84	SCE-10P8	8.75	6.88	5.70
SCE-10086CHNFSS	10.00	8.00	6.00	IS5	364.04	SCE-10P8	8.75	6.88	5.70
SCE-12106CHNFSS	12.00	10.00	6.00	IS5	411.42	SCE-12P10	10.75	8.88	7.72
SCE-12108CHNFSS	12.00	10.00	8.00	IS5	438.43	SCE-12P10	10.75	8.88	7.72
SCE-1212CHNFSS	12.00	12.00	6.00	IS5	440.78	SCE-12P12	10.75	10.88	9.08
SCE-1412CHNFSS	14.00	12.00	6.00	IS5	465.15	SCE-14P12	12.75	10.88	10.13
SCE-1614CHNFSS	16.00	14.00	6.00	IS5	548.38	SCE-16P14	14.75	12.88	19.95

## 316 STAINLESS STEEL CONTINUOUS HINGE ENCLOSURES

ENCLOSURE PRODUCT CODE S7						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-6044CHNFSS6	6.00	4.00	4.00	IS5	211.74	SCE-6P4	4.88	2.88	3.01
SCE-606CHNFSS6	6.00	6.00	4.00	IS5	241.06	SCE-6P6	4.88	4.88	3.61
SCE-8064CHNFSS6	8.00	6.00	4.00	IS5	263.88	SCE-8P6	6.75	4.88	4.17
SCE-1008CHNFSS6	10.00	8.00	4.00	IS5	389.42	SCE-10P8	8.75	6.88	5.70
SCE-10086CHNFSS6	10.00	8.00	6.00	IS5	425.88	SCE-10P8	8.75	6.88	5.70
SCE-12106CHNFSS6	12.00	10.00	6.00	IS5	457.71	SCE-12P10	10.75	8.88	7.72
SCE-12108CHNFSS6	12.00	10.00	8.00	IS5	526.12	SCE-12P10	10.75	8.88	7.72
SCE-1212CHNFSS6	12.00	12.00	6.00	IS5	504.94	SCE-12P12	10.75	10.88	9.08
SCE-1412CHNFSS6	14.00	12.00	6.00	IS5	552.19	SCE-14P12	12.75	10.88	10.13
SCE-1614CHNFSS6	16.00	14.00	6.00	IS5	658.05	SCE-16P14	14.75	12.88	19.95




Available within 10 working days if not in stock

Phone (989) 799-6871  
Fax (989) 799-4524

**SCE** SAGINAW  
CONTROL &  
ENGINEERING  
Your Enclosure Source

# STAINLESS STEEL CONTINUOUS HINGE ENCLOSURES

## TECHNICAL DATA

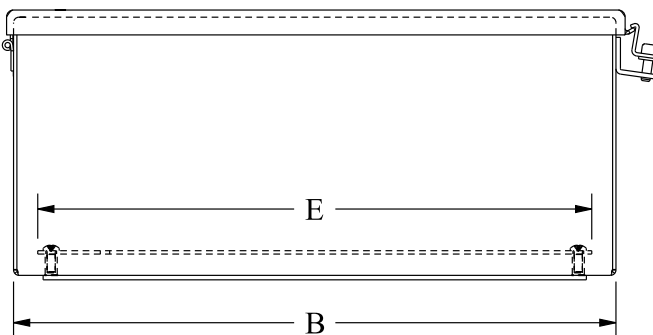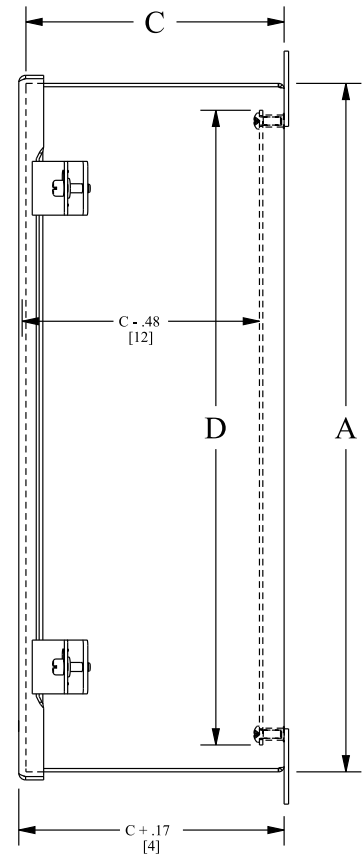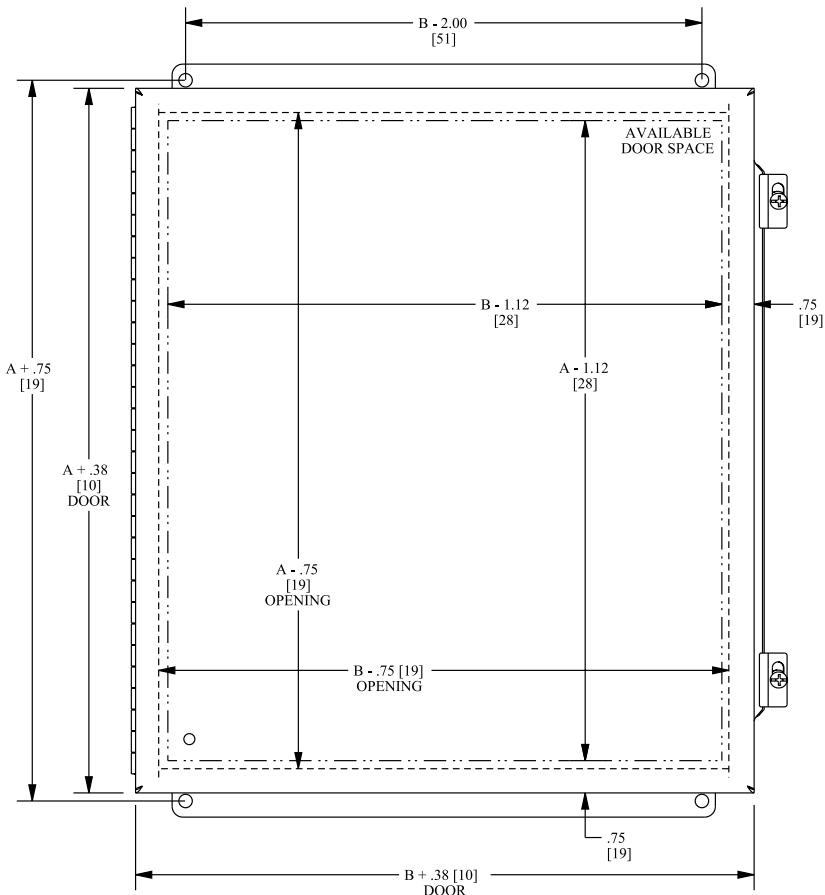

NOTE:  
SUB-PANEL MUST BE ORDERED SEPARATELY

CLAMPING NOTE:  
ENCLOSURES < 10.00 [254] IN HEIGHT REQUIRE  
3 CLAMPS ON DOOR.