

## Heavy Duty Free-Standing Stainless Steel Enclosures For Flange-Mounted Disconnects

### Application -

Designed to house most standard type disconnects. For installation information, consult our Installation Manual at [www.saginawcontrol.com](http://www.saginawcontrol.com).

### Construction -

- 0.104" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Body stiffeners in large enclosures for extra rigidity.
- Heavy duty lifting eyes anchor into reinforced top.
- Removable center posts permit easy sub-panel installation.
- Stainless steel concealed hinges.
- Black zinc die cast coinproof/padlocking handle on main door with black zinc die cast padlocking handle on slave doors.
- 3-point latching mechanism.
- Black quarter turn latches as required.
- Panel supports.
- Large removable print pockets.
- Oil-resistant gasket.
- Removable sub-panels mount on collar studs.
- Master door is far right-hand door on all enclosures.
- Defeater on master door requires a screwdriver to open.
- Mechanical interlock activated by master door prevents slave doors from being opened first. Doors can be closed in any order.
- Ground stud on door.

**Disconnect switch (or circuit breaker) and operating mechanism are not furnished with enclosure.**

### Finish -

#4 brushed finish on all exterior surfaces. Sub-panels are powder coated white.

### IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13  
UL Listed Type 4, 4X & 12  
CSA Type 4, 4X & 12  
IEC 60529 IP66

## HEAVY DUTY FREE-STANDING ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS THREE-DOOR STAINLESS STEEL ENCLOSURES

ENCLOSURE PRODUCT CODE S2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-72XM3EQ18SS	72.00	99.50	18.00	IS5	14,816.33	SCE-64P31** & SCE-64P64**	60.00	27.75	Included
SCE-72XM3EW18SS	72.00	117.50	18.00	IS5	16,677.48	SCE-64P37** & SCE-64P76**	60.00	33.75	Included
SCE-84XM3EW18SS	84.00	117.50	18.00	IS5	18,594.54	SCE-76P37** & SCE-76P76**	72.00	33.75	Included
SCE-84XM3EW24SS	84.00	117.50	24.00	IS5	18,813.76	SCE-76P37** & SCE-76P76**	72.00	33.75	Included
SCE-90XM3EW24SS	90.00	117.50	24.00	IS5	20,748.01	SCE-82P37** & SCE-82P76**	78.00	33.75	Included

*Available within 10 working days if not in stock*



*\*\*Sub-panel included with enclosure.  
Replacement panels can be ordered. Prices  
found in the accessory section.*


Phone (989) 799-6871  
Fax (989) 799-4524



# FREE-STANDING STAINLESS STEEL ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

## TECHNICAL DATA

### THREE-DOOR ENCLOSURE

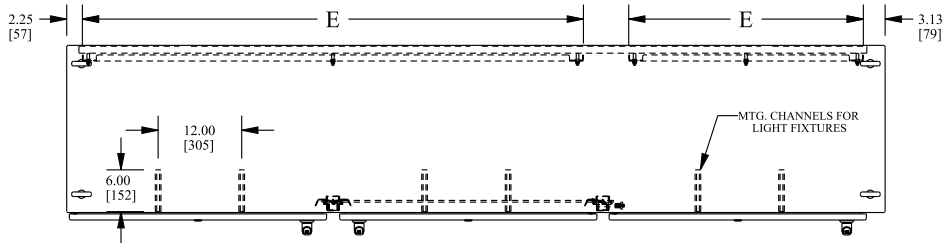

STANDARD DISCONNECTS:  
 F = 11.88 [301,7] when A = 72.00 [1828,8]  
 F = 17.38 [441,4] when A = 84.00 [2133,6]  
 F = 20.38 [517,6] when A = 90.00 [2288,6]

LATCH NOTES:  
 Omit center latch top and bottom of door  
 when door width is < 30.00 [762]

