

Fiberglass Junction Enclosures

Application -

Designed for indoor or outdoor use to house electrical and electronic controls, instruments and components in areas that may be regularly hosed down, are in very wet conditions, or are exposed to corrosive agents. Provides protection from dust, dirt, oil and water. Provides protection from occasional temporary or prolonged submersion.

Construction -

- Fiberglass reinforced compression molded polyester.
- Oil-resistant door gasket.
- Mounting strip molded in.
- Quick release padlock latch.
- Integral panel mounting inserts.
- Stainless steel continuous hinge.

Finish -

Light gray fiberglass. Optional sub-panels are marine grade aluminum.


IS5 - Industry Standards -

NEMA Type 4, 4X, 12 & Type 13

UL Listed Type 4, 4X & 12

CSA Type 4, 4X & 12

IEC 60529 IP66

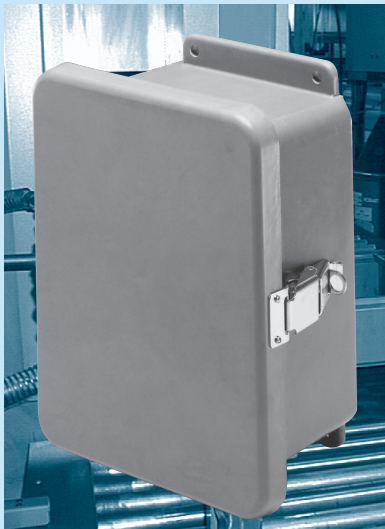

FIBERGLASS JUNCTION ENCLOSURES

ENCLOSURE PRODUCT CODE F1									
Catalog No.	Height (A)	Width (B)	Depth (C)	Mounting (G)	Mounting (H)	Interior (J)	Interior (K)	Interior (L)	Industry Standard
SCE-6045CHQRFG	7.39	5.43	4.75	6.75	2.00	5.84	3.85	4.00	IS5
SCE-6065CHQRFG	7.52	7.50	4.75	6.75	4.00	5.72	5.72	4.00	IS5
SCE-8065CHQRFG	9.50	7.50	4.74	8.88	4.00	7.73	5.74	4.00	IS5
SCE-808CHQRFG	9.50	9.41	4.75	8.75	6.00	7.73	7.73	4.06	IS5
SCE-10085CHQRFG	11.35	9.41	4.25	10.75	6.00	9.73	7.73	3.50	IS5
SCE-12105CHQRFG	13.41	11.43	5.06	12.75	8.00	11.79	9.80	4.50	IS5
SCE-1212CHQRFG	13.41	13.50	6.36	12.75	10.00	11.70	11.70	5.53	IS5
SCE-14087CHQRFG	15.75	8.75	6.81	15.00	5.00	14.00	7.00	6.12	IS5
SCE-14127CHQRFG	15.47	13.50	6.25	14.62	10.00	13.53	11.55	5.37	IS5
SCE-16147CHQRFG	17.45	15.46	6.23	16.75	12.00	15.63	13.60	5.36	IS5
SCE-18169CHQRFG	19.61	17.61	8.82	18.88	12.00	17.69	15.69	7.99	IS5
SCE-2016CHQRFG	21.68	17.68	8.83	21.25	10.00	19.72	15.72	8.00	IS5

SUB-PANELS (F2)		
Catalog No.	Panel Height (D)	Panel Width (E)
SCE-6P4AL	4.88	2.88
SCE-6P6AL	4.88	4.88
SCE-8P6AL	6.88	4.88
SCE-8P8AL	6.75	6.88
SCE-10P8AL	8.88	6.88
SCE-12P10AL	10.88	8.88
SCE-12P12AL	10.88	10.88
SCE-14P8AL	12.88	5.88
SCE-14P12AL	12.88	10.88
SCE-16P14AL	14.88	12.88
SCE-18P16AL	16.88	14.88
SCE-20PJ16AL	18.88	14.88

Phone (989) 799-6871

Fax (989) 799-4524



FIBERGLASS JUNCTION ENCLOSURES TECHNICAL DATA

