

Continuous Hinge Enclosures

Application -

Designed for use as electrical junction boxes, terminal wiring boxes, instrument housings, and electrical control enclosures. Provides protection from dust, dirt, oil and water. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.063" carbon steel.
- Seams continuously welded and ground smooth, no holes or knockouts.
- Continuous hinge with stainless steel pin.
- Stainless steel external screw clamps are quick and easy to operate.
- Oil resistant gasket.
- Standoffs provided for mounting optional sub-panels.
- Ground stud on door and body.

Finish -

ANSI-61 gray powder coated inside and out. Optional sub-panels are powder coated white.

IS2 - Industry Standards -

NEMA Type 4, 12 & Type 13
UL Listed Type 4 & 12
CSA Type 4 & 12
IEC 60529 IP66



CONTINUOUS HINGE ENCLOSURES




ENCLOSURE PRODUCT CODE A1						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-404CHNF	4.00	4.00	3.00	IS2	37.68	No Panel		N/A	
SCE-4044CHNF	4.00	4.00	4.00	IS2	38.97	No Panel		N/A	
SCE-604CHNF	6.00	4.00	3.00	IS2	42.36	SCE-6P4	4.88	2.88	3.01
SCE-6044CHNF	6.00	4.00	4.00	IS2	45.48	SCE-6P4	4.88	2.88	3.01
SCE-606CHNF	6.00	6.00	4.00	IS2	49.37	SCE-6P6	4.88	4.88	3.61
SCE-806CHNF	8.00	6.00	3.50	IS2	53.27	SCE-8P6	6.75	4.88	4.17
SCE-8066CHNF	8.00	6.00	6.00	IS2	62.66	SCE-8P6	6.75	4.88	4.17
SCE-808CHNF	8.00	8.00	4.00	IS2	59.78	SCE-8P8	6.75	6.88	4.89
SCE-8086CHNF	8.00	8.00	6.00	IS2	68.69	SCE-8P8	6.75	6.88	4.89
SCE-1008CHNF	10.00	8.00	4.00	IS2	69.39	SCE-10P8	8.75	6.88	5.70
SCE-1008CHSNF	10.00	8.00	4.00	IS2	73.30	SCE-10P8	8.75	6.88	5.70
SCE-10086CHNF	10.00	8.00	6.00	IS2	79.24	SCE-10P8	8.75	6.88	5.70
SCE-10106CHNF	10.00	10.00	6.00	IS2	80.55	SCE-10P10	8.75	8.88	6.73
SCE-12064CHNF	12.00	6.00	4.00	IS2	63.66	SCE-12P6	10.75	4.88	5.35
SCE-1210CHNF	12.00	10.00	5.00	IS2	87.29	SCE-12P10	10.75	8.88	7.72
SCE-1210CHSNF	12.00	10.00	5.00	IS2	89.33	SCE-12P10	10.75	8.88	7.72
SCE-12106CHNF	12.00	10.00	6.00	IS2	91.96	SCE-12P10	10.75	8.88	7.72
SCE-12108CHNF	12.00	10.00	8.00	IS2	98.74	SCE-12P10	10.75	8.88	7.72
SCE-1212CHNF	12.00	12.00	6.00	IS2	101.32	SCE-12P12	10.75	10.88	9.08
SCE-14086CHNF	14.00	8.00	6.00	IS2	87.06	SCE-14P8	12.75	6.88	7.39
SCE-1412CHNF	14.00	12.00	6.00	IS2	112.50	SCE-14P12	12.75	10.88	10.13
SCE-1412CHSNF	14.00	12.00	6.00	IS2	118.13	SCE-14P12	12.75	10.88	10.13
SCE-14128CHNF	14.00	12.00	8.00	IS2	119.01	SCE-14P12	12.75	10.88	10.13
SCE-16106CHNF	16.00	10.00	6.00	IS2	102.65	SCE-16P10	14.75	8.88	9.90
SCE-1614CHNF	16.00	14.00	6.00	IS2	131.71	SCE-16P14	14.75	12.88	19.95
SCE-1614CHSNF	16.00	14.00	6.00	IS2	138.30	SCE-16P14	14.75	12.88	19.95
SCE-16148CHNF	16.00	14.00	8.00	IS2	143.66	SCE-16P14	14.75	12.88	19.95
SCE-161410CHNF	16.00	14.00	10.00	IS2	150.70	SCE-16P14	14.75	12.88	19.95

Catalog numbers containing an "S" are hinged on the short side.

Phone (989) 799-6871
Fax (989) 799-4524



CONTINUOUS HINGE ENCLOSURES TECHNICAL DATA

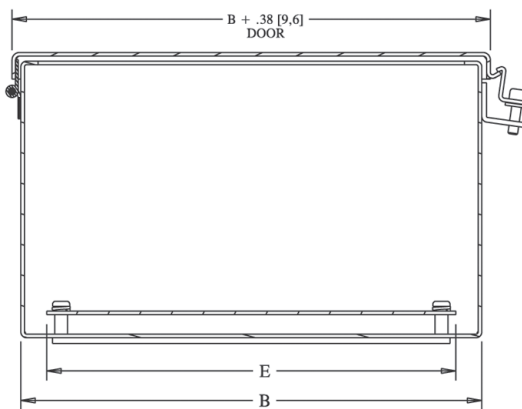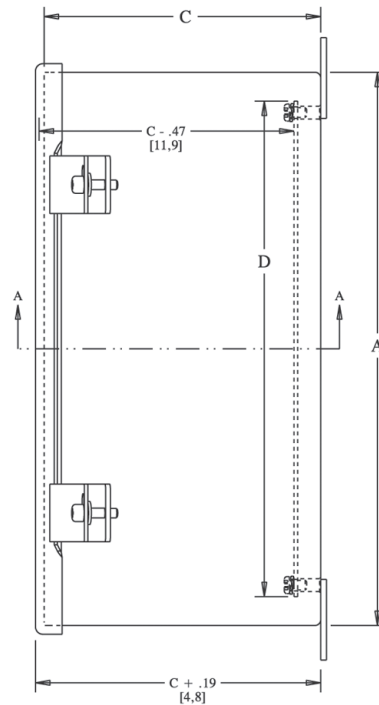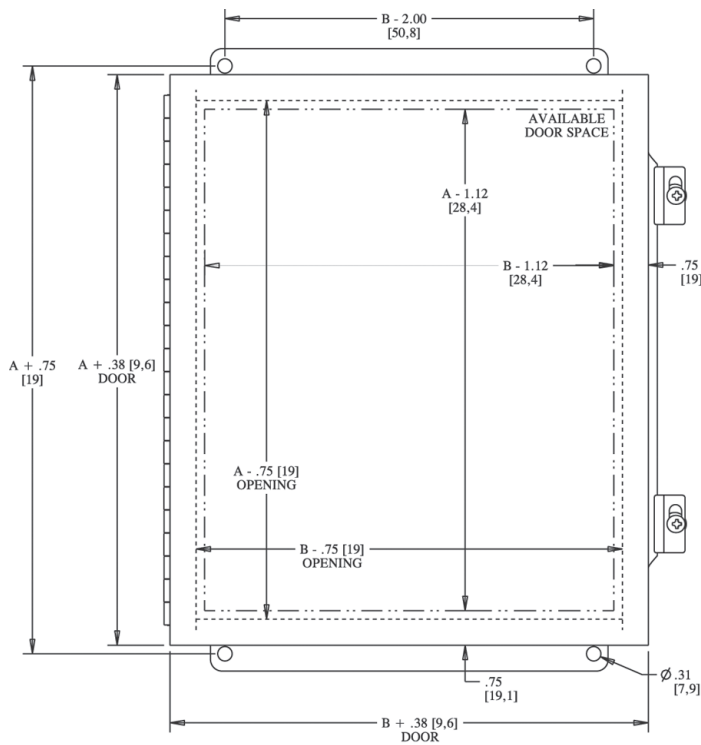

SECTION A-A

NOTE:
Sub-panel must be ordered separately

CLAMPING NOTE:
Enclosures < 10.00 [254] in height require
one clamp centered vertically on door