




Ball Bearings

VALUE & QUALITY V
FLANGE F
4 BOLT 4
ECCENTRIC E

VF4E-100

Lock: Eccentric
Seal: Contact
Housing: Cast Iron
Temperature: -20°F to 200°F
Self Alignment: ±1.5°
Inserts: VE-100
 Dimensions pg 98
 Ratings pg 99

100 1
INTERMEDIATE 0
DUTY 0

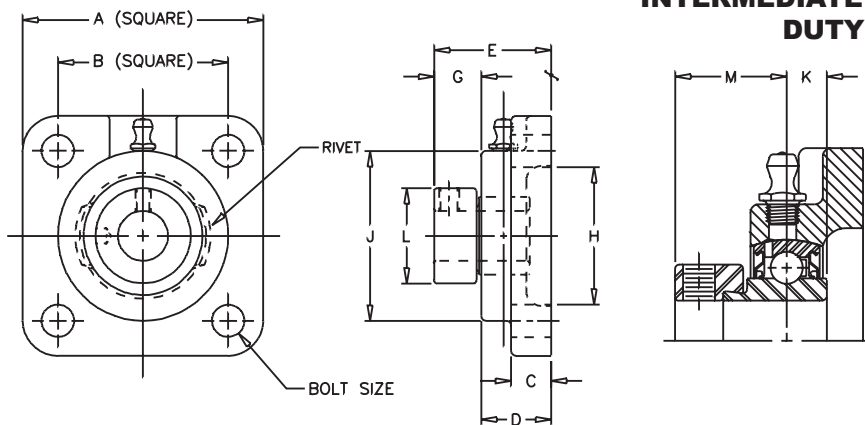

Bore Size	Fitting
1/2" - 1 1/4" S	1/4" - 28NF
1 1/4" - 2 3/16"	1/8" NPT

SHAFT DIA. IN.	UNIT NO.	BRG. NO.	Dimensions in Inches											BOLT SIZE IN.	UNIT WT.		
			A	B	C	D	E	G	H	J	K	L	M				
1/2	VF4E-108	VE-108															
5/8	VF4E-110	VE-110	3	2 1/8	3/8	23/32	1 21/64	39/64	1 3/4	2 1/8	5/16	1 3/16	7/8	3/8	1.1		
3/4	VF4E-112	VE-112	3 3/8	2 1/2	7/16	57/64	1 31/64	19/32	2	2 1/2	11/32	1 5/16	59/64	3/8	1.4		
7/8	VF4E-114	VE-114															
15/16	VF4E-115	VE-115	3 3/4	2 3/4	1/2	61/64	1 35/64	19/32	2 1/2	2 3/4	11/32	1 1/2	59/64	7/16	1.8		
1	VF4E-116	VE-116															
1 1/8	VF4E-118	VE-118															
1 3/16	VF4E-119	VE-119	4 1/4	3 1/4	17/32	1 5/64	1 47/64	21/32	2 7/8	3 1/8	3/8	1 3/4	1 3/64	7/16	2.6		
1 1/4	VF4E-120S	VE-120S															
1 1/4	VF4E-120	VE-120															
1 3/8	VF4E-122	VE-122	4 5/8	3 5/8	19/32	1 5/32	1 29/32	3/4	3 1/4	3 5/8	27/64	2 3/16	1 5/32	1/2	3.6		
1 7/16	VF4E-123	VE-123															
1 1/2	VF4E-124	VE-124	5 1/8	4	5/8	1 19/64	2 7/64	13/16	3 1/2	4 1/8	31/64	2 3/8	1 9/32	1/2	4.7		
1 11/16	VF4E-127	VE-127															
1 3/4	VF4E-128	VE-128	5 3/8	4 1/8	5/8	1 21/64	2 9/64	13/16	3 7/8	4 3/8	31/64	2 1/2	1 9/32	9/16	5.0		
1 15/16	VF4E-131	VE-131															
2	VF4E-132S	VE-132S	5 5/8	4 3/8	5/8	1 23/64	2 5/32	51/64	4	4 9/16	1/2	2 3/4	1 9/32	9/16	5.6		
2	VF4E-132	VE-132															
2 3/16	VF4E-135	VE-135	6 3/8	5 1/8	13/16	1 33/64	2 7/16	59/64	4 1/4	5 1/4	35/64	3	1 7/16	5/8	7.7		

CROSS REFERENCE TO COMPETITORS PRODUCTS

REPLACES DODGE F4B-SXV		REPLACES SKF FY-FM	
REPLACES FAFNIR VCJ	REPLACES LINK-BELT F3-W200U	REPLACES HUB CITY FB220	REPLACES BOSTON F*

Refer to Interchange Section Page 166 for more detail.
 *-Check length through bore ("E" dimension)

See page 156 for trademark acknowledgments.