


DC MOTOR DIMENSIONS

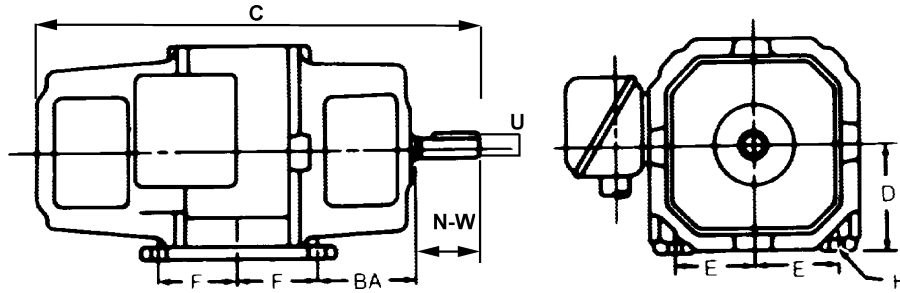

Frame	HP	D	E	2F	H	U	BA	N-W	DP C	TEFC C
56C	1/4 PM	3.50	2.44	3.00	0.34	0.63	2.75	1.88	10.94	-
56C	1/3 PM	3.50	2.44	3.00	0.34	0.63	2.75	1.88	11.91	-
56C	1/2 PM	3.50	2.44	3.00	0.34	0.63	2.75	1.88	11.91	-
56C	3/4 PM	3.50	2.44	3.00	0.34	0.63	2.75	1.88	13.09	-
56C	1 PM	3.50	2.44	3.00	0.34	0.63	2.75	1.88	14.44	-
143TC	PM	3.50	2.44	4.00	0.34	0.87	2.25	2.25	16.47	-
145TC	PM	3.50	2.44	4.00	0.38	0.87	2.75	2.25	18.19	-
184TC	PM	4.50	3.75	4.25	0.41	1.13	3.50	2.75	24.09	-
56C	1/4 SW	3.50	2.44	3.00	0.34	0.63	2.75	1.88	13.31	-
56C	1/3 SW	3.50	2.44	3.00	0.34	0.63	2.75	1.88	13.31	-
56C	1/2 SW	3.50	2.44	3.00	0.34	0.63	2.75	1.88	14.31	-
56C	3/4 SW	3.50	2.44	3.00	0.34	0.63	2.75	1.88	14.81	-
56C	1 SW	3.50	2.44	3.00	0.34	0.63	2.75	1.88	16.13	-
184C	1-1/2 SW	4.50	3.75	4.50	0.41	0.88	2.75	2.25	17.31	-
184C	2 SW	4.50	3.75	4.50	0.41	0.88	2.75	2.25	21.81	-
184TC		4.50	3.75	4.25	0.41	1.13	2.75	2.75	25.81	-
215C		5.25	4.25	7.00	0.41	1.13	3.50	3.00	20.06	-
256UC		6.25	5.00	10.00	0.53	1.38	4.25	3.75	25.75	-

PM = Permanent Magnet
SW = Shunt Wound