




Ball Bearings

VALUE & QUALITY V
FLANGE F
FOUR BOLT 4
SET SCREW S

VF4S-100

Lock: Set Screw
Seal: Contact
Housing: Cast Iron
Temperature: -20°F to 200°F
Self Alignment: ±1.5°
Inserts: VS-100
 Dimensions pg 47
 Ratings pg 48

100 1
INTERMEDIATE 0
DUTY 0

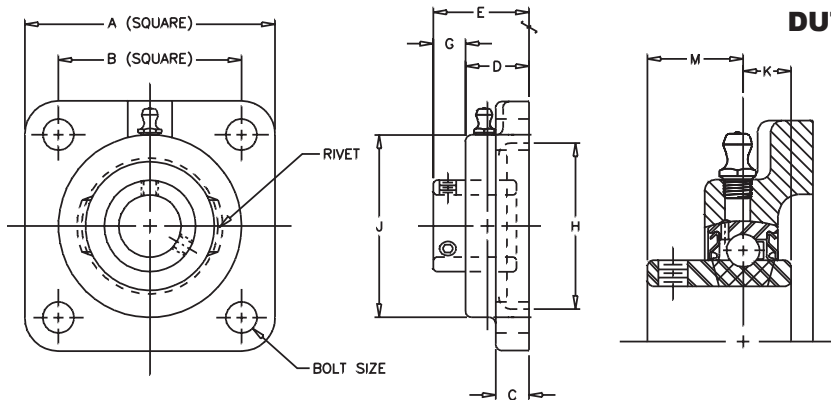

Bore Size	Fitting
1/2" - 1 1/4" S	1/4" - 28NF
1 1/4" - 2 3/16"	1/8" NPT

SHAFT DIA. IN	UNIT NO.	BRG. NO.	Dimensions In Inches										BOLT SIZE IN.	UNIT WT.
			A	B	C	D	E	G	H CORED	J	K	M		
1/2	VF4S-108	VS-108	3	2 1/8	3/8	23/32	1 5/64	23/64	1 3/4	2 1/8	5/16	5/8	3/8	1.0
5/8	VF4S-110	VS-110	3	2 1/8	3/8	23/32	1 5/64	23/64	1 3/4	2 1/8	5/16	5/8	3/8	1.0
3/4	VF4S-112	VS-112	3 3/8	2 1/2	7/16	57/64	1 9/32	25/64	2	2 1/2	11/32	23/32	3/8	1.3
7/8	VF4S-114	VS-114	3 3/4	2 3/4	1/2	61/64	1 25/64	7/16	2 1/2	2 3/4	11/32	49/64	7/16	1.7
15/16	VF4S-115	VS-115	3 3/4	2 3/4	1/2	61/64	1 25/64	7/16	2 1/2	2 3/4	11/32	49/64	7/16	1.7
1	VF4S-116	VS-116												
1 1/8	VF4S-118	VS-118	4 1/4	3 1/4	17/32	1 5/64	1 15/32	25/64	2 7/8	3 1/8	3/8	25/32	7/16	2.4
1 3/16	VF4S-119	VS-119	4 1/4	3 1/4	17/32	1 5/64	1 15/32	25/64	2 7/8	3 1/8	3/8	25/32	7/16	2.4
1 1/4	VF4S-120S	VS-120S												
1 1/4	VF4S-120	VS-120	4 5/8	3 5/8	19/32	1 5/32	1 39/64	29/64	3 1/4	3 5/8	27/64	55/64	1/2	3.4
1 3/8	VF4S-122	VS-122	4 5/8	3 5/8	19/32	1 5/32	1 39/64	29/64	3 1/4	3 5/8	27/64	55/64	1/2	3.4
1 7/16	VF4S-123	VS-123	5 1/8	4	5/8	1 19/64	1 49/64	15/32	3 1/2	4 1/8	31/64	15/16	1/2	4.4
1 1/2	VF4S-124	VS-124	5 1/8	4	5/8	1 19/64	1 49/64	15/32	3 1/2	4 1/8	31/64	15/16	1/2	4.4
1 11/16	VF4S-127	VS-127	5 3/8	4 1/8	5/8	1 21/64	1 13/16	31/64	3 7/8	4 3/8	31/64	61/64	9/16	4.7
1 3/4	VF4S-128	VS-128	5 3/8	4 1/8	5/8	1 21/64	1 13/16	31/64	3 7/8	4 3/8	31/64	61/64	9/16	4.7
1 15/16	VF4S-131	VS-131	5 5/8	4 3/8	5/8	1 23/64	1 59/64	9/16	4	4 9/16	1/2	1 3/64	9/16	5.4
2	VF4S-132S	VS-132S												
2	VF4S-132	VS-132	6 3/8	5 1/8	13/16	1 33/64	2 7/64	19/32	4 1/4	5 1/4	35/64	1 7/64	5/8	7.7
2 3/16	VF4S-135	VS-135	6 3/8	5 1/8	13/16	1 33/64	2 7/64	19/32	4 1/4	5 1/4	35/64	1 7/64	5/8	7.7

CROSS REFERENCE TO COMPETITORS PRODUCTS

REPLACES DODGE F4B-VSC	REPLACES MB FC4-25	REPLACES HUB CITY FB250	REPLACES BOSTON SF**
REPLACES FAFNIR SCJ	REPLACES LINK-BELT F3-S200E		

Refer to Interchange Section Page 166 for more detail.
 **-Narrow length through bore

See page 156 for trademark acknowledgments.