




300

**VALUE & QUALITY V**  
**FLANGE F**  
**CARTRIDGE C**  
**BOA B**

**300 3**  
**MEDIUM 0**  
**DUTY 0**

# VFCB-300

**Lock:** BOA Concentric  
**Seal:** Contact  
**Housing:** Cast Iron  
**Temperature:** -20°F to 200°F  
**Self Alignment:** ±1.5°  
**Inserts:** VB-300  
 Dimensions pg 68  
 Rating pg 69

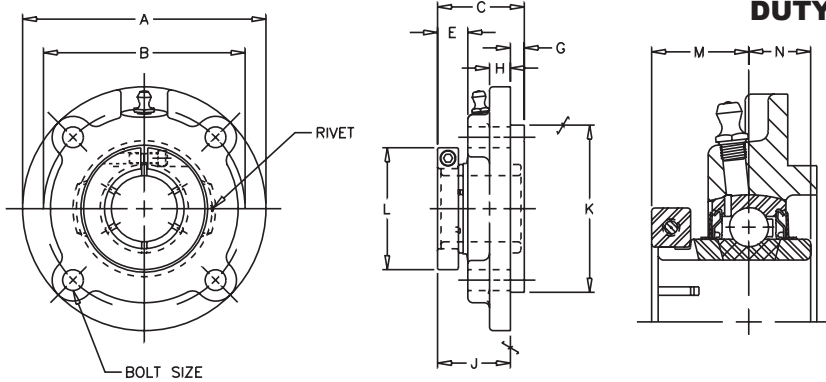

Bore Size	Fitting
1"	1/4" - 28NF
1 3/16" - 2 3/16"	1/8" NPT

SHAFT DIA. IN.	UNIT NO.	BRG. NO.	Dimensions In Inches											BOLT SIZE IN.	UNIT WT
			A	B	C	E	G	H	J	K*	L	M	N		
1	VFCB-316	VB-316	4 3/8	3 5/8	1 9/16	35/64	1/4	3/8	1 5/16	3	2 1/16	15/16	5/8	3/8	2.7
1 3/16	VFCB-319	VB-319	5	4 1/8	1 3/4	21/32	3/8	3/8	1 3/8	3 3/8	2 7/16	1 1/16	11/16	3/8	3.7
1 1/4	VFCB-320	VB-220													
1 7/16	VFCB-323	VB-323	5 1/4	4 3/8	2	25/32	7/16	3/8	1 9/16	3 5/8	2 11/16	1 1/4	3/4	3/8	4.2
1 1/2	VFCB-324	VB-324	6 1/8	5 1/8	2	25/32	7/16	3/8	1 9/16	4 1/4	2 13/16	1 1/4	3/4	7/16	5.8
1 11/16	VFCB-327	VB-327	6 1/8	5 1/8	2 1/8	55/64	15/32	3/8	1 21/32	4 1/4	3 1/4	1 11/32	3/4	7/16	6.8
1 3/4	VFCB-328	VB-328													
1 15/16	VFCB-331	VB-331	6 3/8	5 3/8	2 17/64	55/64	5/8	3/8	1 41/64	4 1/2	3 1/2	1 3/8	7/8	7/16	7.1
2	VFCB-332	VB-232	7 1/8	6	2 15/16	1 1/16	7/8	1/2	2 1/16	5	4 1/16	1 5/8	1	1/2	7.7
2 3/16	VFCB-335	VB-335													

\*Tolerance ±.001"

## CROSS REFERENCE TO COMPETITORS PRODUCTS

REPLACES DODGE FC-DLM			

Refer to Interchange Section Page 166 for more detail.

See page 156 for trademark acknowledgments.