

# CLASS T – JLLN / JLLS SERIES FUSES

300/600 VAC • Fast-Acting • 1-1200 A



## Description

JLLN / JLLS fuses are less than 1/3 the size of comparable Class R fuses and are typically used for short circuit protection of drives and surge sensitive components. When rated in accordance with the NEC®, JLLN / JLLS fuses provide fast-acting overload and short circuit protection for non-inductive circuits and equipment.

## Features/Benefits

- Extremely current-limiting
- Compact design
- 200 kA Interrupting Rating

## Applications

- Variable speed drive protection
- Compact mains switches

## Specifications

### Voltage Ratings

AC: 300 V (JLLN)  
600 V (JLLS)  
DC: 160 V (JLLN 1 – 60 A)  
125 V (JLLN 70 – 1200 A)  
300 V (JLLS)

### Interrupting Ratings

AC: 200 kA rms symmetrical  
DC: 20 kA (JLLN 35-1200 A only)

### Ampere Range

1 – 1200 A

### Approvals

AC: Standard 248-15, Class T  
UL Listed (File: E81895):  
JLLN (1 – 1200 A)  
JLLS (1 – 800 A)  
UL Recognized (File: E71611)  
JLLN PCB Mount (35 – 60 A)  
JLLS (900 – 1200 A)  
CSA Certified (File: LR29862)  
JLLN/JLLS (1 – 600 A)  
DC: UL Listed (File: E81895):  
JLLN (35 – 1200 A)  
Littelfuse self-certified  
JLLN (1 – 30 A)  
JLLS (1 – 1200 A)

### Environmental


RoHS Compliant  
(Note: Not all amperages are RoHS compliant.  
Contact the factory for additional details.)

## Ordering Information

AMPERE RATINGS					
1	25	70	175	450	1100
2	30	80	200	500	1200
3	35	90	225	600	
6	40	100	250	700	
10	45	110	300	800	
15	50	125	350	900*	
20	60	150	400	1000	

\*JLLS only

## Part Numbering System

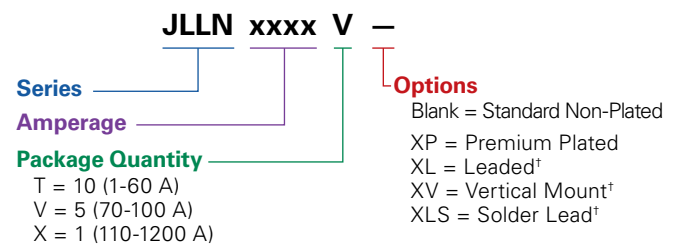

SERIES	AMP	PACK SIZE	PLATING SUFFIX	MOUNT SUFFIX	CATALOG NUMBER	ORDERING NUMBER
JLLS	6	T	–	–	JLLS006	JLLS006.T
JLLN	35	V	–	XL†	JLLN035L	JLLN035.VXL
JLLN	100	V	XP	–	JLLN100P	JLLN100.VXP

†Option is available for JLLN 35-60 A only. Premium plating is standard

## Web Resources

Download TC Curves, CAD drawings and other technical information: [littelfuse.com/jlln](http://littelfuse.com/jlln)  
[littelfuse.com/jlls](http://littelfuse.com/jlls)

## Recommended Fuse Holders


LFT30 Series  
LFT60 Series  
LSCR Series for 700-800 A

## Dimensions

Please refer to the Class T dimensions on page 4

# CLASS T – JLLN / JLLS SERIES FUSES

## Peak Let-Thru Curve and Current-Limiting Effects of JLLN (300 V) Fuses


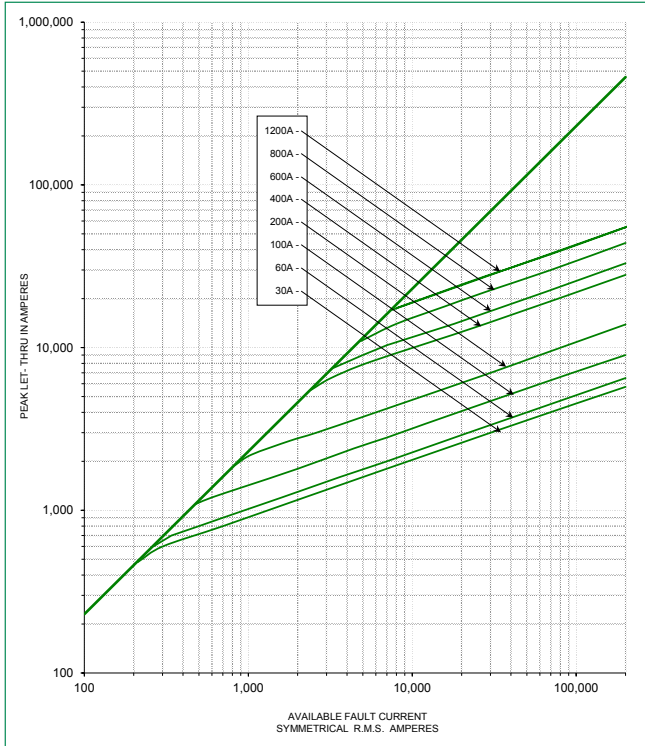


SHORT CIRCUIT CURRENT*	APPARENT RMS SYMMETRICAL CURRENT FOR VARIOUS FUSE RATINGS							
	30 A	60 A	100 A	200 A	400 A	600 A	800 A	1200 A
5,000	700	775	1,100	1,650	3,500	4,000	5,000	5,000
10,000	900	1,000	1,400	2,100	4,400	5,100	6,750	8,250
15,000	1,000	1,100	1,600	2,400	5,000	5,900	7,750	10,000
20,000	1,100	1,250	1,800	2,700	5,500	6,500	8,750	11,000
25,000	1,230	1,300	1,950	2,900	6,000	7,000	9,500	12,000
30,000	1,300	1,475	2,050	3,100	6,400	7,500	10,000	12,500
35,000	1,330	1,575	2,150	3,300	6,750	7,750	10,500	13,500
40,000	1,430	1,600	2,300	3,500	7,000	8,000	11,000	14,000
50,000	1,500	1,750	2,400	3,700	7,500	8,750	12,000	15,000
60,000	1,700	1,900	2,700	4,000	8,000	9,500	12,500	16,000
80,000	1,850	2,100	2,800	4,400	9,000	10,500	14,000	17,500
100,000	2,000	2,250	3,150	4,800	9,750	11,500	15,000	18,500
150,000	2,300	2,600	3,600	5,500	11,000	13,000	17,500	22,000
200,000	2,600	2,800	3,900	6,000	12,000	14,500	19,500	24,000

\*Prospective RMS Symmetrical Amperes Short-Circuit Current  
Note: Data Derived from Peak Let-Thru Curves

# CLASS T – JLLN / JLLS SERIES FUSES

## Peak Let-Thru Curve and Current-Limiting Effects of JLLS (600 V) Fuses

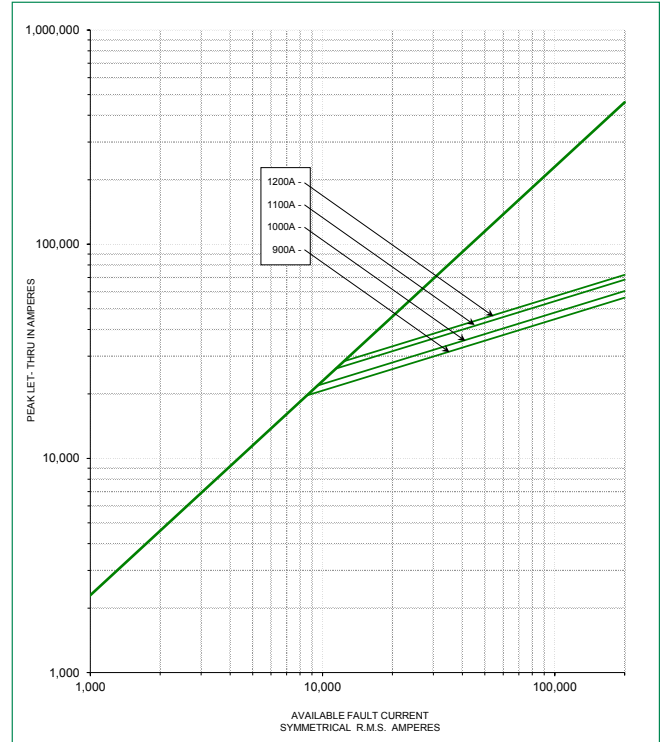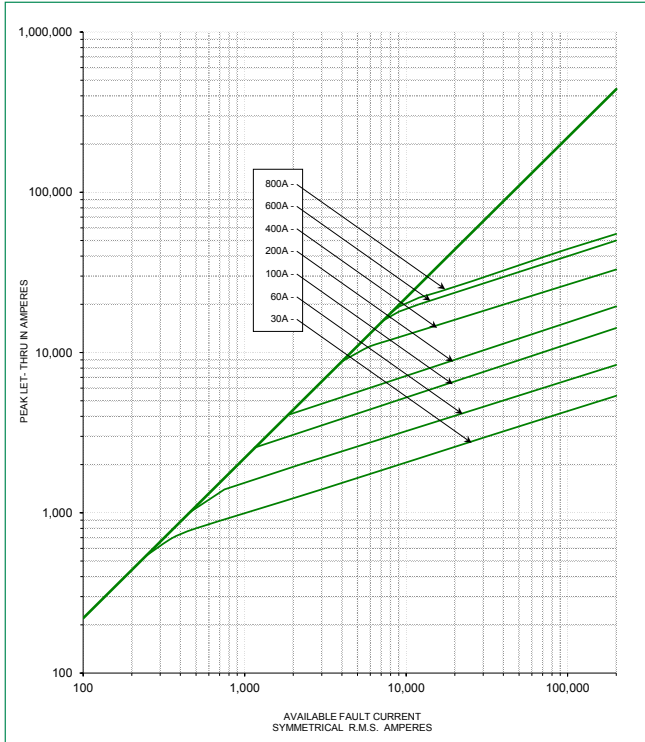

SHORT CIRCUIT CURRENT*	APPARENT RMS SYMMETRICAL CURRENT FOR VARIOUS FUSE RATINGS							
	30 A	60 A	100 A	200 A	400 A	600 A	800 A	1200 A
5,000	750	1,225	1,810	2,500	4,600	5,000	5,000	5,000
10,000	945	1,525	2,300	3,150	6,000	8,500	9,400	10,000
15,000	1,050	1,700	2,610	3,600	6,600	9,750	10,500	13,000
20,000	1,150	1,900	2,900	3,950	7,250	10,500	11,000	14,750
25,000	1,300	2,050	3,100	4,250	8,000	11,500	12,500	15,500
30,000	1,375	2,150	3,300	4,500	8,250	12,000	13,750	16,500
35,000	1,400	2,250	3,500	4,750	8,500	13,000	14,000	17,000
40,000	1,425	2,400	3,650	4,950	8,700	14,000	14,750	18,000
50,000	1,600	2,450	3,900	5,350	9,500	14,500	16,000	20,000
60,000	1,650	2,625	4,150	5,650	10,000	15,500	17,300	21,000
80,000	1,825	2,800	4,570	6,250	11,000	17,000	18,750	23,000
100,000	2,000	3,100	4,950	6,700	12,000	18,000	20,000	25,000
150,000	2,250	3,400	5,650	7,700	13,000	21,000	23,000	28,500
200,000	2,450	3,800	6,200	8,450	15,000	23,000	25,000	31,000

\*Prospective RMS Symmetrical Amperes Short-Circuit Current  
Note: Data Derived from Peak Let-Thru Curves

# CLASS T – JLLN / JLLS SERIES FUSES

## Dimensions Inches (mm)

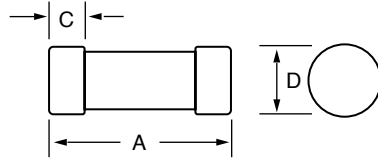


Fig. 1




Fig. 2


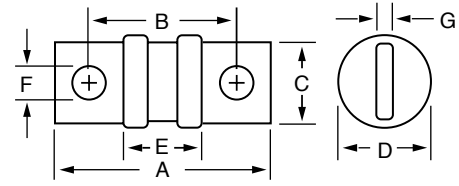


Fig. 3


AMPERES	REFER TO FIG. NO.	SERIES	DIMENSIONS INCHES (mm)						
			A	B	C	D	E	F	G
1 – 30	1	JLLN	7/16 (22.2)	—	9/32 (7.1)	13/32 (10.3)	—	—	—
		JLLS	1/2 (38.1)	—	9/32 (7.1)	9/16 (14.3)	—	—	—
35 – 60	2	JLLN	7/16 (22.2)	—	9/32 (7.1)	9/16 (14.3)	—	—	—
		JLLS	19/16 (39.7)	19/16 (20.6)	19/32 (10.3)	1 (25.4)	1/16 (1.6)	13/32 (27.8)	—
70 – 100	3	JLLN	25/32 (54.8)	19/16 (39.7)	3/4 (19.1)	13/16 (20.6)	27/32 (21.4)	9/32 (7.1)	1/8 (3.2)
		JLLS	261/64 (75.0)	223/64 (59.9)	3/4 (19.1)	13/16 (20.6)	141/64 (41.7)	9/32 (7.1)	1/8 (3.2)
110 – 200	3	JLLN	27/16 (61.9)	111/16 (42.9)	7/8 (22.2)	11/16 (27.0)	27/32 (21.4)	11/32 (8.7)	3/16 (4.8)
		JLLS	33/4 (82.6)	21/2 (63.5)	7/8 (22.2)	11/16 (27.0)	121/32 (42.1)	11/32 (8.7)	3/16 (4.8)
225 – 400	3	JLLN	23/4 (69.9)	127/32 (46.8)	1 (25.4)	15/16 (33.3)	53/64 (21.0)	13/32 (10.3)	1/4 (6.4)
		JLLS	35/8 (92.1)	223/32 (69.1)	1 (25.4)	119/32 (40.5)	123/32 (43.7)	13/32 (10.3)	1/4 (6.4)
450 – 600	3	JLLN	31/16 (77.8)	21/32 (51.6)	11/4 (31.8)	119/32 (40.5)	7/8 (22.2)	31/64 (12.3)	5/16 (7.9)
		JLLS	363/64 (101.2)	261/64 (75.0)	11/4 (31.8)	21/16 (52.4)	149/64 (44.8)	31/64 (12.3)	5/16 (7.9)
700 – 800	3	JLLN	33/8 (85.7)	27/32 (64.3)	13/4 (44.5)	21/16 (52.4)	7/8 (22.2)	35/64 (13.9)	3/8 (9.5)
		JLLS	421/64 (109.9)	311/64 (80.6)	13/4 (44.5)	21/2 (63.5)	155/64 (47.2)	35/64 (13.9)	3/8 (9.5)
900 – 1200	3	JLLN	4 (101.6)	217/32 (64.3)	2 (50.8)	21/2 (63.5)	11/32 (26.2)	39/64 (15.5)	7/16 (11.1)
		JLLS	5.27 (133.9)	3.80 (96.5)	2 (50.8)	2.63 (66.8)	2.30 (58.4)	0.67 (15.5)	0.44 (11.2)

## PCB Mounting Options (JLLN 35-60 A Only)

### Vertical Mount JLLN-V

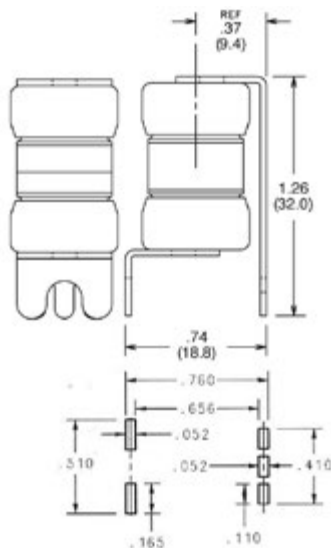

### Leaded JLLN-L

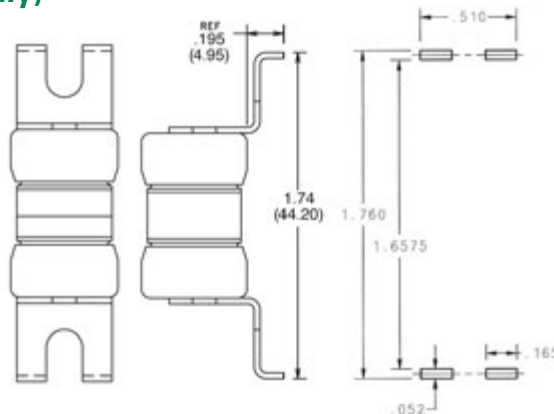

### Solder JLLN-LS

