

# Dimensions

Figure 2: Models 2056, 4031, 4038


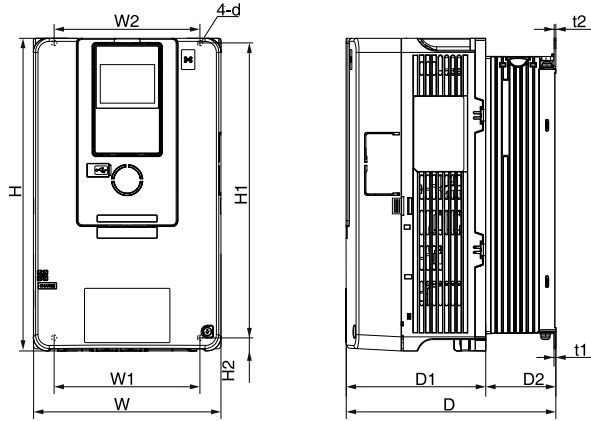


Figure 3: Models 2257, 2313, 4208 - 4302

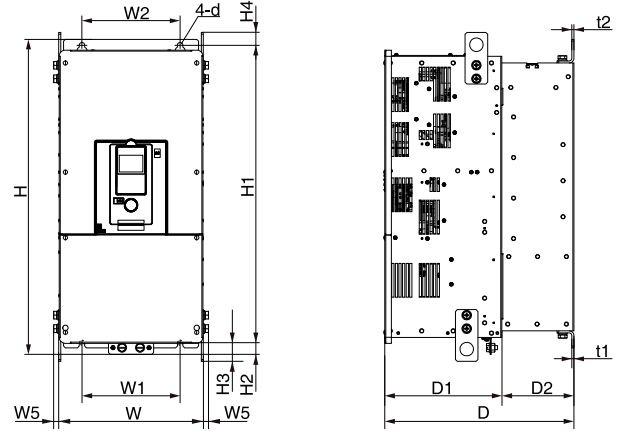

Additional Information	
Frame 1 - Models 2004 - 2012 4002 - 4005	Frame 1.5 - Models 2018 - 2042, 4007 - 4023
Frame 2 - Models 2056, 4031 - 4038	Frame 3 - Models 2070 - 2082, 4044
Frame 3.5 - Model 4060	Frame 4 - Models 2110, 4075
Frame 6 - Models 2138, 4084 - 4103	Frame 7 - Models 2169 - 2211, 4140 - 4168
Frame 9 - Models 2257 - 2113, 4208 - 4302	Frame 10 - Models 2360 - 2415, 4371 - 414
Frame 11 - Models 4477 - 4720	

Table 3: Frame Size and Approximate Dimensions

Power Output (HP)		240 V Drives				480 V Drives			
Normal Duty (ND)	Heavy Duty (HD)	Catalog Code GA80U. .	Output Amps		Frame	Catalog Code GA80U. .	Output Amps		Frame
			ND	HD			ND	HD	
1.0	0.75	2004ABM	0.2	3.5	1	4002ABM	2.1	1.8	1
1.5	1	2006ABM	6	5	1	-	-	-	-
2	1.5	2008ABM	8	6.9	1	4004ABM	4.1	3.4	1
3	2	2010ABM	9.6	8	1	4005ABM	5.4	4.8	1
4	3	2012ABM	12.2	11	1	4007ABM	7.1	5.5	1.5
5	4	2018ABM	17.5	14	1.5	4009ABM	8.9	7.2	1.5
7.5	5	2021ABM	21	17.5	1.5	4012ABM	11.9	9.2	1.5
10	7.5	2030ABM	30	25	1.5	4018ABM	17.5	14.8	1.5
15	10	2042ABM	42	33	1.5	4023ABM	23.4	18	1.5
20	15	2056ABM	56	47	2	4031ABM	31	24	2
25	20	2070ABM	70	60	3	4038ABM	38	31	2
30	25	2082ABM	82	75	3	4044ABM	44	39	3
40	30	2110ABM	110	88	4	4060ABM	59.6	45	3.5
50	40	2138ABM	138	115	6	4075ABM	74.9	60	4
60	50	2169ABM	169	145	7	4089ABM	89.2	75	6
75	60	2211ABM	211	180	7	4103ABM	103	91	6
100	75	2257ABM	257	215	9	4140ABM	140	112	7
125	100	2313ABM	313	283	9	4168ABM	168	150	7
150	125	2360ABM	360	346	10	4208ABM	208	180	9
150	150	2415ABM	415	415	10	-	-	-	-
200	150	N/A				4250ABM	250	216	9
250	200					4302ABM	302	260	9
300	250					4371ABM	371	304	10
350	300					4414ABM	414	371	10
400	350					4477ABM	477	414	11
450	400					4568ABM	568	477	11
500	450					4605ABM	675	605	11
600	500					4720ABM	720	605	11

Approximate Dimensions in (mm)			
Frame	Height	Width	Depth
1	10.2 (260)	5.51 (140)	6.93 (176)
1.5	10.2 (260)	5.51 (140)	8.31 (211)
2	11.8 (300)	7.09 (180)	7.95 (202)
3	13.8 (350)	8.66 (220)	8.94 (227)
3.5	13.8 (350)	8.66 (220)	9.69 (246)
4	15.7 (400)	9.45 (240)	11.0 (280)
6	17.7 (450)	10.0 (255)	11.0 (280)
7	21.4 (543)	10.4 (264)	13.2 (335)
9	27.6 (700)	12.3 (312)	16.5 (420)
10	31.5 (800)	17.3 (440)	18.6 (472)
11	44.72 (1136)	20.1 (510)	18.9 (480)